



Hydraulic diagnostic products

Fixed position and portable equipment

Content

Portable hydraulic testers

General design features	Page	1
Flo-Check® USB hydraulic system analyzer	Page	2
PFM6 series portable hydraulic tester	Page	4
PFM6 BD series bi-directional tester	Page	6
PFM8 series digital tester and dynamometer	Page	8
F6100 series sensor arrays with load valve	Page	10
Pressure drop charts for testers	Page	12

Turbine flow sensors

General design features	Page	13
Activa sensor arrays	Page	14
Ultima sensor arrays	Page	16
Classic turbine flow sensors	Page	18
Quad series turbine flow sensors	Page	20
Pressure drop charts for turbine flow sensors	Page	22

Accessories

K-factor scaler	Page	23
Pressure sensor	Page	24
Temperature sensor	Page	25
Cable assemblies	Page	26


Diagnostic test equipment

MC4000	Page	28
--------	------	----

Hydraulic formulas & viscosity information

Page	29
------	----

General design features

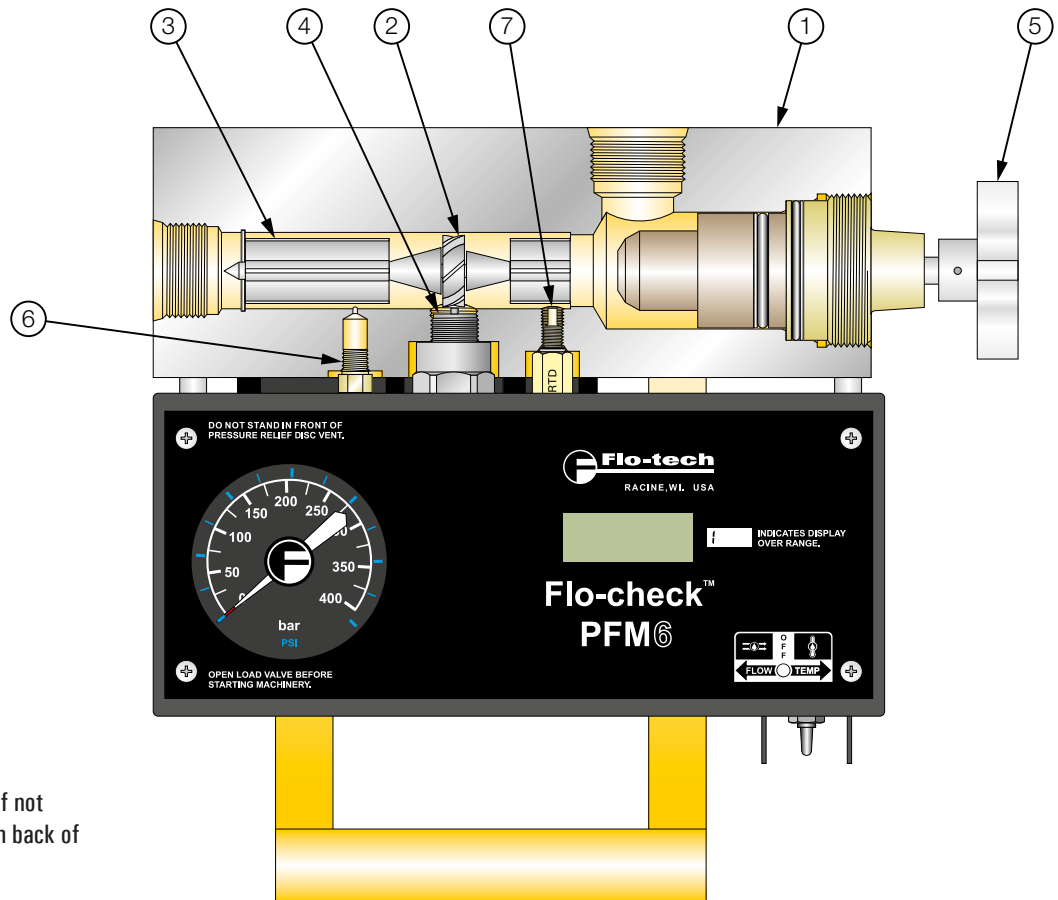

1. Housing
2. Turbine rotor
3. Rotor supports
4. Magnetic pick-up
5. Loading valve
6. Pressure sensor
7. Temperature sensor
8. Internal pressure relief not illustrated. Located on back of housing.

Operating principle

Flo-tech's portable hydraulic testers simultaneously measure the flow rate, temperature, pressure and optionally, power of hydraulic fluid. Designed for testing pumps, valves, cylinders, motors, hydrostatic or power shift transmissions and power steering systems in both mobile and stationary applications, these compact units utilize turbine flow meter technology.

Flow: As fluid passes through the tester, it turns the turbine rotor. As each turbine blade passes the magnetic pick-up, an electrical signal is generated. This frequency signal is proportional to the flow rate and is transmitted to the tester's electronics for display on a PC screen or the front panel LCD of the tester's electronic case.

Temperature: All testers contain an internal temperature sensor for measuring the temperature of the fluid as it passes through the flow meter body.

Pressure: Pressure is provided in either analog or digital format, depending on the model of the tester. PFM6 and PFM6BD testers are equipped with helical type pressure gauges, while the PFM8 tester includes a silicon strain gauge pressure sensor and the Flo-Check® USB tester utilizes a piezoelectric pressure sensor.

Power: Power measurements are derived from the product of flow and pressure. The Flo-Check® USB and the PFM8 are designed to calculate this measurement and display the results in either horsepower or kilowatts. When using the PFM6 or PFM6BD, power can be calculated using the following formulas:

$$\text{H.P.} = \frac{\text{gal/min} \times \text{psi}}{1714} \qquad \text{H.P.} = \frac{\text{l/min} \times \text{bar}}{447.4}$$

$$\text{kW} = \frac{\text{l/min} \times \text{bar}}{600}$$

Designed for both ease of operation and safety, all testers feature loading valves with fingertip control and pressure surge protection.

Flo-Check[®] USB hydraulic system analyzer

Simultaneously measures flow, pressure, temperature



- Flow accuracy $\pm 1\%$ of reading @ 32 cSt
- Field selectable US or metric readings
- High and low set point alarms for flow, pressure and temperature
- Captures pressure spikes up to 10,000 psi (0.2 milliseconds duration)
- Exports saved data to Microsoft Excel[®] and other spreadsheet programs
- USB powered
- Easy to use, plug and play
- Calculates hydraulic power
- Select continuous monitoring or capture data manually
- Logs up to 12 hours
- Records alarm history

The Flo-Check[®] hydraulic system analyzer can be used as a stationary or portable tester for both industrial and mobile hydraulic system diagnostics, and analysis of the prognostic health of a hydraulic system. It features flow, pressure and temperature sensors that are monitored by a data acquisition module. This module records the operating parameters of the system and transfers them to the user's laptop via the USB port.

The custom software utility is a Windows[®]-based application which is compatible with Windows Vista[®], Windows XP, Windows 2000, and Windows 7. This intuitive software configures the displayed information into user-selected engineering units and provides real-time graphics with instantaneous readings and trends for all three measurement parameters. The software also permits the data to be saved for export into a spreadsheet program.

The hydraulic system analyzer is powered through the USB port of a PC, making it easy to set up and ideal for portable applications. Interfaced to the PC application, the hydraulic analyzer offers a straightforward method of monitoring system parameters complete with data acquisition.



SPECIFICATIONS

Performance

Flow:

Accuracy	$\pm 1\%$ of reading @ 32 cSt
Repeatability	$\pm 0.2\%$

Pressure:

Accuracy	$< \pm 0.5\%$ BFSL
Stability	$< \pm 0.25\%$ of full scale
Zero offset	$< \pm 2\%$ of full scale
TC zero and TC span	$< \pm 1.5\%$ of full scale
Response time	0.2 milliseconds

Temperature:

Calibration error (25 °C)	± 1 °C
Absolute error (over full range of sensor, 0 to 150 °C)	
Without calibration	± 3 °C
With calibration	± 1.6 °C
Nonlinearity	± 0.4 °C
Repeatability	± 0.1 °C

Data acquisition:

Sample rate	10 kHz
PC screen update/record rate	1 second (average 10K samples)
Flow	1 second (average 10K samples)
Temperature	1 second (min, max, average 10K samples)
Pressure	1 second (min, max, average 10K samples)

Power

USB power:	+5 VDC (supplied through USB port of a PC)
USB voltage tolerance:	+4.6 VDC min, +5.25 VDC max
Current:	100 mA, typ

Environmental

Pressure rating:	414 bar (6000 psi) maximum with a 3:1 safety factor; capable of 10,000 psi transients
Operating pressure:	414 bar, 41.4 MPA, 420 kg/cm ² (<6000 psi); capable of 10,000 psi transients
Internal valve by-pass:	7500 psi ΔP
Pressure drop:	See ΔP charts on page 12
Fluid temperature:	-40 to +150 °C (-40 to +300 °F)
Ambient temperature:	0 to +85 °C (+32 to +185 °F)
Storage temperature:	-40 to +85 °C (-40 to +185 °F)
Humidity:	0-90%, non-condensing

Material

Housing:	6013-T351 aluminum; anodized
Turbine rotor:	T416 stainless steel
Rotor supports:	6061-T6 aluminum alloy
Seals:	Viton [®] standard; EPR optional
Ball bearings:	440C stainless steel
Hub cones:	6061-T6 aluminum alloy
Temperature probe:	T303 stainless steel
Valve:	12L14 steel body with 303 SS seat
Spool/Sleeve:	12L14 steel
Magnetic pick-up:	
Body	T303 stainless steel
Nut	T303 stainless steel
Electronic case:	Cold rolled steel; black zinc plate with clear seal
Ports:	SAE straight thread O-ring boss, female J1926/1; ISO1179 (BSPP)

Flo-Check[®] USB hydraulic system analyzer

Simultaneously measures flow, pressure and temperature

SOFTWARE

The Flo-tech analyzer software provides a real-time graphical and digital interface for monitoring and/or recording pressure, temperature and flow rate parameters from the hydraulic analyzer. In addition to the graphical and digital displays, the main screen also consists of a menu bar, buttons with common functions and alarm indicators.



The software offers the following options:

- View real time pressure, temperature, flow rate and power measurements
- Record all measurements to a file
- Choice of recording all measurement points or capturing points manually
- Selection of all measurement units, US or metric
- Ability to adjust display of graph data
- High/Low alarm indicators set by the operator

All measurements taken can be saved once per second to a comma separated value (.csv) file for export into a spreadsheet program. For example, recording for 2 minutes would yield 120 points of data. Even though data points are only recorded once per second, pressure spikes and dips are captured by recording the maximum or minimum pressure during each measurement period. Therefore, the precise shape of the pressure spike is not recorded but its amplitude and the time it occurred are both recorded.


Graphs

The graph on the main screen contains more than 60 points of data. Previous data points are saved in memory and can be viewed at any time. Adjustments can be made to optimize data that is displayed by hiding individual graph plots, adjusting the scale of each plot or adding horizontal gridlines to the graph.

Measurement (over a 1 second time period)	Color indication	Alarm indication	Digital indication	Graphical display	Record to file
Average pressure	Green	●	●	●	●
Minimum pressure	Dark green			●	●
Maximum pressure	Dark green			●	●
Average temperature	Blue	●	●	●	●
Average flow rate	Yellow	●	●	●	●
Average power	Orange		●		●

Alarms

There are three sets of high/low alarm indicators on the main screen which monitor pressure, temperature and flow rate. Alarm indicators flash if the current system measurements exceed the alarm limits set by the operator and continue to flash when the current system measurements return to normal to alert the operator that an alarm condition occurred. Alarms must be reset manually to acknowledge the alarm condition.

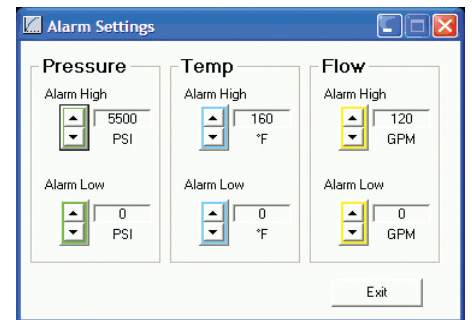

ORDERING INFORMATION

Model number ¹	Nominal port size	Flow range
F7160	SAE 16	3 - 85 gal/min
F7161	SAE 24	7 - 199.9 gal/min
F7162	G 1	15 - 321 l/min
F7163	G 1 ½	26 - 757 l/min

¹ Each Flo-Check[®] hydraulic system analyzer includes a 16.4 ft. (5 M) USB, a male to B male (IP 68) connection cable, CD-Rom of the software utility, and complete operating instructions packaged in a protective carrying case.

ACCESSORIES

Model number	Description
F001109	5-point calibration certificate ²
F001110	10-point calibration certificate ²
F1614-7500	Pressure relief disc, 7500 psi (1 per tester)

² Certificates are traceable to NIST, ISO 9001.



PFM6 digital portable hydraulic tester

Simultaneously measures flow, pressure, temperature



- Five flow ranges
- Large 3 1/2 digit LCD for flow and temperature
- Helical tube pressure gauge
- One toggle switch to control power and select flow and temperature
- Loading valve with fingertip control of pressure
- Platinum resistance temperature sensor
- Pressure surge protection with internal pressure relief
- Turbine flow sensor provides fast response
- Available with SAE or BSPP ports
- Pressures up to 414 bar (6000 psi)
- Temperatures up to 150 °C (300 °F)
- Flow accuracy $\pm 1\%$ of full scale
- Repeatability $\pm 0.2\%$

The PFM6 series is a compact, lightweight portable tester designed for fast diagnostic troubleshooting of all types of mobile or stationary hydraulic systems and components. These self-contained testers feature laboratory accuracy and provide flow, pressure and temperature measurements simultaneously from one point.

Simple operation includes a toggle switch to display either flow or temperature readings and a loading valve that operates with fingertip control. The dual scale helical tube pressure gauge offers pulsation dampening and high overpressure capacity. For safe operation, all testers include an internal pressure relief system.

SPECIFICATIONS

Performance

Flow accuracy:	$\pm 1\%$ of full scale
Repeatability:	$\pm 0.2\%$
Turbine response:	≤ 200 ms
Temperature:	
Fluid	-20 to +150 °C (-4 to +300 °F)
Ambient	-20 to +55 °C (-4 to +131 °F)
Flow readout:	Linearity and zero shift ± 1 digit
Operating pressure:	Up to 414 bar, 41.4 MPA, 420 kg/cm ² (6000 psi)
Pressure drop:	See ΔP charts on page 12
Readout accuracy:	± 1 digit


Material

Housing:	6013-T651 aluminum; anodized
Turbine rotor:	T416 stainless steel
Ball bearings:	440C stainless steel
Rotor shaft:	T303 stainless steel
Rotor supports:	
PFM6-15/30	CA360 brass
PFM6-60/85/200	6061-T6 aluminum alloy
Hub cones:	6061-T6 aluminum alloy
Valve body:	
PFM6-15/30	Cold rolled steel; zinc plate, dichromate finish
PFM6-60/85/200	
Valve stem:	12L14 steel; zinc plate, dichromate finish
Poppet:	T303 stainless steel
Sleeve:	12L14 steel; hardened
PFM6-200 only	D.O.M. steel tube
Temperature probe:	T303 stainless steel
Magnetic pick-up:	
Body	T303 stainless steel
Nut	T303 stainless steel
Seals:	Buna N standard; Viton® and EPR optional
Carrying handle:	Cast aluminum; anodized
Electronic case & cover:	Cold rolled steel; zinc plate with clear seal, epoxy black paint
Battery:	4 AA size alkaline, ~ 50 hours of service
Ports:	SAE straight thread O-ring boss, female J1926/1; ISO1179 (BSPP)

PFM6 digital portable hydraulic tester

Simultaneously measures flow, pressure and temperature

DIMENSIONS

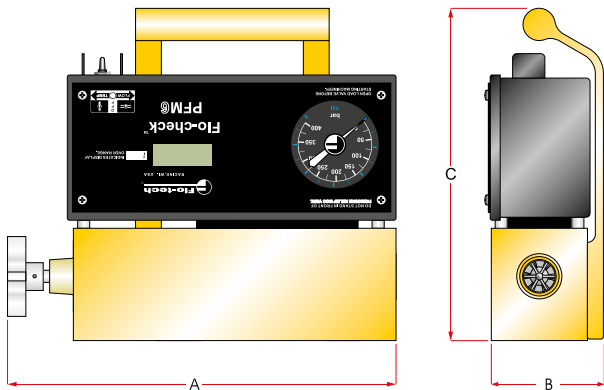

Series	A Length mm (inches)	B Depth mm (inches)	C Height mm (inches)	Weight kg (lbs)
PFM6-15	287 (11.3)	92 (3.6)	262 (10.3)	6.3 (13.85)
PFM6-30	287 (11.3)	92 (3.6)	262 (10.3)	6.3 (13.85)
PFM6-60	292 (11.5)	92 (3.6)	262 (10.3)	7.5 (16.50)
PFM6-85	292 (11.5)	92 (3.6)	262 (10.3)	7.5 (16.50)
PFM6-200	311 (12.3)	105 (4.1)	275 (10.8)	9.1 (20.00)

ORDERING INFORMATION

Series	Nominal port size	Flow range	Model number	STD or CE model	Pressure gauge units of measure
PFM6-15	SAE 12	1 - 15 gal/min	F5080 * - XXX	Leave blank for standard model or CE for CE option	psi bar MPA kg/cm ²
PFM6-30	SAE 12	2 - 30 gal/min	F5079 * - XXX		
PFM6-60	SAE 16	3 - 60 gal/min	F5078 * - XXX		
PFM6-85	SAE 16	4 - 85 gal/min	F5077 * - XXX		
PFM6-200	SAE 24	7 - 199.9 gal/min	F5076 * - XXX		
PFM6-15	G 3/4	4 - 56 l/min	F5110 * - XXX		
PFM6-30	G 3/4	7.5 - 113.6 l/min	F5111 * - XXX		
PFM6-60	G 1	12 - 227 l/min	F5112 * - XXX		
PFM6-85	G 1	15 - 321 l/min	F5113 * - XXX		
PFM6-200	G 1 1/2	26 - 757 l/min	F5114 * - XXX		

EXAMPLES:

F5076-PSI = PFM6-200
SAE 24 ports
7 - 199.9 gal/min flow range
Standard model
Psi pressure units

F5111CE-BAR = PFM6-30
G 3/4 ports
7.5 - 113.6 l/min flow range
CE certified
Bar pressure units

ACCESSORIES

Model number	Description	Series
F4934-1530	Carrying case	PFM6-15 & PFM6-30
F4934-6085	Carrying case	PFM6-60 & PFM6-85
F4934-200	Carrying case	PFM6-200
F1614-7500	Pressure relief disc, 7500 psi (1 per tester)	All PFM6s
F001109	5-point calibration certificate ¹	All PFM6s
F001110	10-point calibration certificate ¹	All PFM6s

¹ Certificates are traceable to NIST, ISO 9001.

PFM6 BD bi-directional hydraulic tester

Simultaneously measures flow, pressure and temperature



- Bi-directional in-line testing capabilities in three flow ranges
- Large 3 1/2 digit LCD for flow and temperature
- Helical tube pressure gauge
- One toggle switch to control power and select flow and temperature
- Loading valve with fingertip control of pressure
- Platinum resistance temperature sensor
- Pressure surge protection with internal pressure relief
- Turbine flow sensor provides fast response
- SAE ports
- Pressures up to 414 bar (6000 psi)
- Temperatures up to 150 °C (300 °F)
- Flow accuracy $\pm 1\%$ of full scale
- Repeatability $\pm 0.2\%$

The PFM6BD series includes all the features of the standard PFM6 series with the added benefit of bi-directional flow measurement. Designed for fast diagnostic troubleshooting of all types of mobile or stationary hydraulic systems and components, these compact testers offer laboratory accuracy and provide flow, pressure and temperature measurements simultaneously from one point.

SPECIFICATIONS

Performance

Flow accuracy:

Forward	$\pm 1\%$ of full scale
Reverse	$\pm 2\%$ of full scale

Repeatability:

$\pm 0.2\%$

Turbine response:

≤ 200 ms

Temperature:

Fluid	-20 to +150 °C (-4 to +300 °F)
Ambient	-20 to +55 °C (-4 to +131 °F)

Flow readout:

Linearity and zero shift ± 1 digit

Operating pressure:

Up to 414 bar (6000 psi, 41.4 MPA, 420 kg/cm²)

Pressure drop:

See ΔP charts on page 12

Readout accuracy:

± 1 digit

Material

Housing:

6013-T651 aluminum; anodized

Turbine rotor:

T416 stainless steel

Ball bearings:

440C stainless steel

Rotor shaft:

T303 stainless steel

Rotor supports:

6061-T6 aluminum alloy

Hub cones:

6061-T6 aluminum alloy

Valve body:

12L14 steel; zinc plate, dichromate finish

Valve stem:

T303 stainless steel

Spool/sleeve:

4340 Alloy steel; hardened

Temperature probe:

T303 stainless steel

Magnetic pick-up:

Body T303 stainless steel

Nut T303 stainless steel

Seals:

Buna N standard; Viton® and EPR optional

Carrying handle:

Cast aluminum; anodized

Electronic case & cover:

Cold rolled steel; zinc plate with clear seal, epoxy black paint

Battery:

4 AA size alkaline,
~ 50 hours of service


Ports:

SAE straight thread O-ring boss, female J1926/1

PFM6 BD bi-directional hydraulic tester

Simultaneously measures flow, pressure and temperature

DIMENSIONS

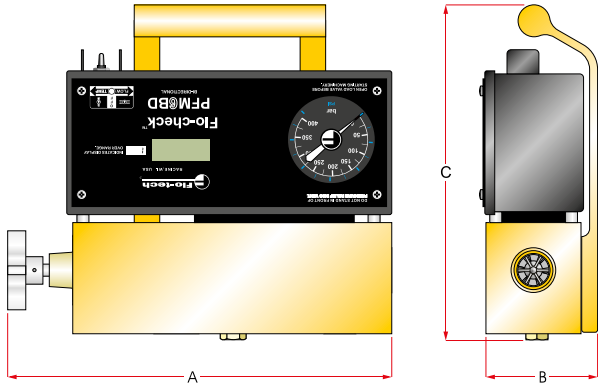

Series	A Length mm (inches)	B Depth mm (inches)	C Height mm (inches)	Weight kg (lbs)
PFM6BD-60	287 (11.3)	92 (3.6)	265 (10.4)	7.5 (16.50)
PFM6BD-85	287 (11.3)	92 (3.6)	265 (10.4)	7.5 (16.50)
PFM6BD-200	300 (11.8)	105 (4.1)	277 (10.9)	9.0 (19.50)

ORDERING INFORMATION

Series	Nominal port size	Flow range	Model number	STD or CE Model	Pressure gauge units of measure
PFM6BD-60	SAE 16	12 - 227 l/min (3 - 60 gal/min)	F5082 * - XXX	Leave blank for standard model or CE for CE option	psi bar MPA kg/cm²
PFM6BD-85	SAE 16	15 - 321 l/min (4 - 85 gal/min)	F5083 * - XXX		
PFM6BD-200	SAE 24	26 - 757 l/min (7 - 199.9 gal/min)	F5084 * - XXX		

EXAMPLES:

F5083-PSI = PFM6BD-85
SAE 16 ports
15 - 321 l/min (4 - 85 gal/min)
Standard model
Psi pressure units

F5082CE-PSI = PFM6BD-60
SAE 16 ports
12 - 227 l/min (3 - 60 gal/min)
CE certified
Psi pressure units

ACCESSORIES

Model number	Description	Series
F4934-6085	Carrying case	PFM6BD-60 & PFM6BD-85
F4934-200	Carrying case	PFM6BD-200
F1614-7500	Pressure relief disc, 7500 psi (2 per tester)	All PFM6BDs
F001109	5-point calibration certificate ¹	All PFM6BDs
F001110	10-point calibration certificate ¹	All PFM6BDs

¹ Certificates are traceable to NIST, ISO 9001.

PFM8 digital hydraulic tester & dynamometer

Simultaneously measures flow, pressure, power and temperature



- Five flow ranges
- Front panel selectable US or metric readings
- Dynamometer reads power (HP & kW) directly
- 3 ½ digit LCDs for digital display of flow, temperature, pressure and power
- Large easy-to-use membrane switch
- Loading valve with fingertip control of pressure
- Silicon strain gauge pressure sensor
- Platinum resistance temperature sensor
- Pressure surge protection with internal pressure relief
- Turbine flow sensor provides fast response
- Pressures up to 414 bar (6000 psi)
- Temperatures up to 150 °C (300 °F)
- Flow accuracy $\pm 1\%$ of full scale
- Repeatability $\pm 0.2\%$

The all digital PFM8 series combines a compact, lightweight hydraulic tester and a dynamometer in one unit. Designed for fast diagnostic troubleshooting of all types of hydraulic systems and components, including engine-pump combinations. These testers make all flow, temperature, pressure and power measurements from one point. A bonus feature of this series is the capability to switch from US to metric units of measure in the field.

Each tester utilizes two digital displays, one for flow and temperature and a second display for pressure and power. Simple operation includes a large format membrane switch for on/off control and selection of units of measure to be displayed. A loading valve with fingertip control and an internal pressure relief system are standard features.

SPECIFICATIONS

Performance

Flow accuracy:	$\pm 1\%$ of full scale
Repeatability:	$\pm 0.2\%$
Turbine response:	≤ 200 ms
Temperature:	
Fluid	-20 to +150 °C (-4 to +300 °F)
Ambient	-20 to +55 °C (-4 to +131 °F)
Flow readout:	Linearity and zero shift ± 1 digit
Operating pressure:	Up to 414 bar, 41.4 MPA, 420 kg/cm ² (6000 psi)
Pressure drop:	See ΔP charts on page 12
Readout accuracy:	± 1 digit


Material

Housing:	6013-T651 aluminum; anodized
Turbine rotor:	T416 stainless steel
Ball bearings:	440C stainless steel
Rotor shaft:	T303 stainless steel
Rotor supports:	
PFM6-15/30	CA360 brass
PFM6-60/85/200	6061-T6 aluminum alloy
Hub cones:	6061-T6 aluminum alloy
Valve body:	
PFM6-15/30	Cold rolled steel; zinc plate, dichromate finish
PFM6-60/85/200	12L14 Steel; zinc plate, dichromate finish
Valve stem:	T303 stainless steel
Poppet:	12L14 steel; hardened
Sleeve:	
PFM6-200 only	D.O.M. steel tube
Temperature probe:	T303 stainless steel
Magnetic pick-up:	
Body	T303 stainless steel
Nut	T303 stainless steel
Seals:	Buna N standard; Viton® and EPR optional
Carrying handle:	Cast aluminum; anodized
Electronic case & cover:	Cold rolled steel; zinc plate with clear seal, epoxy black paint
Battery:	AA size alkaline, ~ 50 hours of service
Ports:	SAE straight thread O-ring boss, female J1926/1

PFM8 digital hydraulic tester & dynamometer

Simultaneously measures flow, pressure, power and temperature

DIMENSIONS

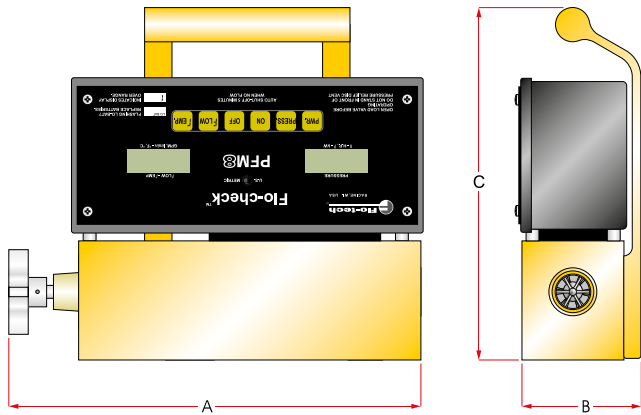

Series	A Length mm (inches)	B Depth mm (inches)	C Height mm (inches)	Weight kg (lbs)
PFM8-15	287 (11.3)	92 (3.6)	262 (10.3)	6.3 (13.85)
PFM8-30	287 (11.3)	92 (3.6)	262 (10.3)	6.3 (13.85)
PFM8-60	292 (11.5)	92 (3.6)	265 (10.4)	7.5 (16.50)
PFM8-85	292 (11.5)	92 (3.6)	265 (10.4)	7.5 (16.50)
PFM8-200	311 (12.3)	105 (4.1)	277 (10.9)	9.1 (20.00)

ORDERING INFORMATION

Series	Nominal port size	Flow range	Power HP (kW)	Model number
PFM8-15	SAE 12	4 - 56 l/min (1 - 15 gal/min)	52.5 (39)	F5061
PFM8-30	SAE 12	7.5 - 113.6 l/min (2 - 30 gal/min)	105 (78)	F5058
PFM8-60	SAE 16	12 - 227 l/min (3 - 60 gal/min)	210 (157)	F5052
PFM8-85	SAE 16	15 - 321 l/min (4 - 85 gal/min)	298 (222)	F5053
PFM8-200	SAE 24	26 - 757 l/min (7 - 199.9 gal/min)	700 (522)	F5054

EXAMPLES:

F5061 = PFM8-15
SAE 12 ports
4 - 56 l/min (1 - 15 gal/min)

F5053 = PFM8-85
SAE 16 ports
15 - 321 l/min (4 - 85 gal/min)

ACCESSORIES

Model number	Description	Series
F4934-1530	Carrying case	PFM8-15 & PFM8-30
F4934-6085	Carrying case	PFM8-60 & PFM8-85
F4934-200	Carrying case	PFM8-200
F1614-7500	Pressure relief disc, 7500 psi (1 per tester)	All PFM8s
F001109	5-point calibration certificate ¹	All PFM8s
F001110	10-point calibration certificate ¹	All PFM8s

¹ Certificates are traceable to NIST, ISO 9001.

Sensor array with load valve

Simultaneously measures flow, pressure and temperature



- Four flow ranges
- Analog (4-20 mA or 0-5 VDC) or pulse output for flow rate
- Silicon strain gauge pressure sensor with 4-20 mA output
- Platinum resistance temperature sensor with 4-20 mA output
- Loading valve with fingertip control of pressure
- Pressure surge protection
- Turbine flow sensor provides fast response
- Pressures up to 414 bar (6000 psi)
- Temperatures up to 150 °C (300 °F)
- Flow accuracy $\pm 1\%$ of reading @ 32 cSt
- Repeatability $\pm 0.2\%$

The sensor array is used for diagnostic evaluation of hydraulic motors, pumps, valves, hydrostatic drives and cylinders. When performed as part of a routine preventative maintenance program, catastrophic or untimely repairs are minimized. All that is required is to make quick and easy fluid line connections between the sensing array and appropriate locations in the hydraulic circuit. The load valve is used to create a restriction so that a relief valve setting or internal leakage of a valve or hydraulic cylinder can be determined. The efficiency of a hydraulic pump or motor can be similarly established and compared to factory specifications.

SPECIFICATIONS

Performance

Flow accuracy:	$\pm 1\%$ of reading @ 32 cSt
Repeatability:	$\pm 0.2\%$
Turbine response:	≤ 200 ms
Temperature:	
Fluid	-20 to +150 °C (-4 to +300 °F)
Ambient	-20 to +55 °C (-4 to +131 °F)
Operating pressure:	Up to 414 bar, 41.4 MPA, 420 kg/cm ² (6000 psi)
Pressure drop:	See ΔP charts on page 12

IFC signal converter

Option:	F to I	F to V
Power:	Loop powered, 6V insertion loss max 10 to 30 VDC supply range	10 to 26 VDC
Inputs:	Magnetic pick-up	Magnetic pick-up
Frequency	0 to 3500 Hz	0 to 3500 Hz
Trigger sensitivity	30 mV p-p	30 mV p-p
Frequency measurement accuracy	$\pm 1\%$	$\pm 1\%$
Analog output:	4-20 mA current loop	0-5 VDC
Resolution	1:4000	1:4000
Temperature drift	50 ppm / °C max	50 ppm / °C max
Response	1.6 seconds min	1.6 seconds min

Environmental

Ambient temperature	-30 to +70 °C (-22 to +158 °F)	-30 to +70 °C (-22 to +158 °F)
Humidity	0-90%, non-condensing	0-90%, non-condensing

Magnetic pick-up, option: Self-generating alternating pulse
Electrical output signal 100 mV RMS (100 Hz) minimum

Pressure sensor: See page 24 for complete
(optional) specification

Temperature sensor: See page 25 for complete
(optional) specification


Material

Housing:	6013-T651 aluminum; anodized
Turbine rotor:	T416 stainless steel
Ball bearings:	440C stainless steel
Rotor shaft:	T303 stainless steel
Rotor supports:	
PFM6-15/30	CA360 brass
PFM6-85/200	6061-T6 aluminum alloy
Hub cones:	6061-T6 aluminum alloy
Valve body:	
PFM6-15/30	Cold rolled steel; zinc plate, dichromate finish
PFM6-60/85/200	12L14 steel; zinc plate, dichromate finish
Valve stem:	T303 stainless steel
Poppet:	12L14 steel; hardened
Sleeve:	
PFM6-200 only	D.O.M. steel tube
Temperature probe:	T303 stainless steel
Magnetic pick-up:	
Body	T303 stainless steel
Nut	T303 stainless steel
Seals:	Buna N standard; Viton® and EPR optional
Carrying handle:	Cast aluminum; anodized
Ports:	SAE straight thread O-ring boss, female J1926/1; ISO1179 (BSPP)

Sensor array with load valve

Simultaneously measures flow, pressure and temperature

DIMENSIONS

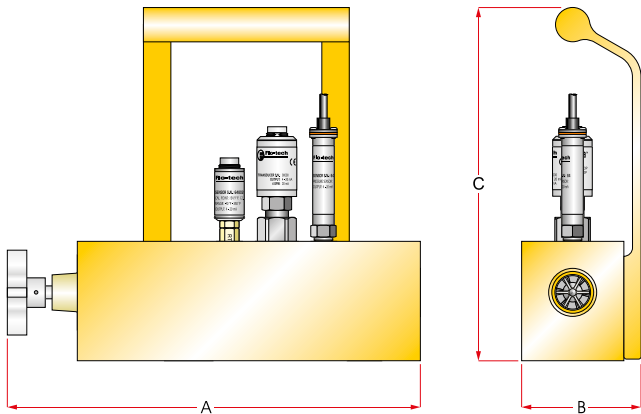

Model	A Length mm (inches)	B Depth mm (inches)	C Height mm (inches)	Weight kg (lbs)
F6150 / F6161	287 (11.3)	92 (3.6)	262 (10.3)	6.3 (13.85)
F6153 / F6163	287 (11.3)	92 (3.6)	262 (10.3)	6.3 (13.85)
F6156 / F6165	292 (11.5)	92 (3.6)	262 (10.3)	7.5 (16.50)
F6159 / F6167	311 (12.3)	105 (4.1)	275 (10.8)	9.1 (20.00)

ORDERING INFORMATION

Nominal port size	Flow range	Model number	Flow transducer	Seals	Temperature	Pressure
SAE 12	1 - 15 gal/min	F6150	F Frequency (mag pick-up) I 4-20 mA out (IFC) V 0-5 VDC out (IFC)	B Buna N V Viton® E EPR	T with sensor G G 1/4 (F) plugged O SAE 2 (J514) plugged	1 69 bar (1000 psi) sensor 3 207 bar (3000 psi) sensor 5 345 bar (5000 psi) sensor 6 414 bar (6000 psi) sensor G G 1/4 (F) plugged O 1/4 NPTF (F) plugged
SAE 12	2 - 30 gal/min	F6153				
SAE 16	4 - 85 gal/min	F6156				
SAE 24	7 - 199.9 gal/min	F6159				
G 3/4	4 - 56 l/min	F6161				
G 3/4	7.5 - 113.6 l/min	F6163				
G 1	15 - 321 l/min	F6165				
G 1 ½	26 - 757 l/min	F6167				

EXAMPLES:

F6150-IB-T6 = SAE 12 ports
 1 - 15 gal/min flow range
 4-20 mA output
 Buna N seals
 Temperature sensor
 414 bar (6000 psi) pressure sensor

F6165-FV-G5 = G 1 ports
 15 - 321 l/min flow range
 Frequency output
 Viton® seals
 G 1/4 (F) plugged temp port
 345 bar (5000 psi) pressure sensor









ACCESSORIES

Model number	Description	Series	For information about	Refer to
F1614-7500	Pressure relief disc, 7500 psi (1 per sensor)	All	Digital displays	Contact factory
F001109	5-point calibration certificate ¹	Sensor Arrays	Pressure sensors	Page 24
F001110	10-point calibration certificate ¹		Temperature sensor	Page 25
			Cables	Pages 26-27

¹ Certificates are traceable to NIST, ISO 9001.

Flow vs pressure drop charts



Flo-Check® USB, PFM series and F6100 sensor arrays

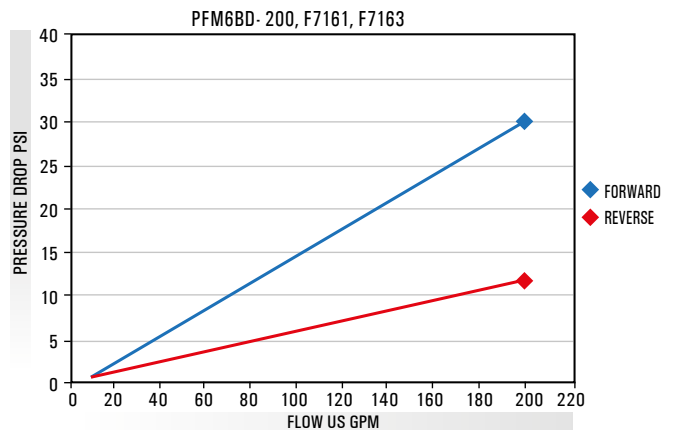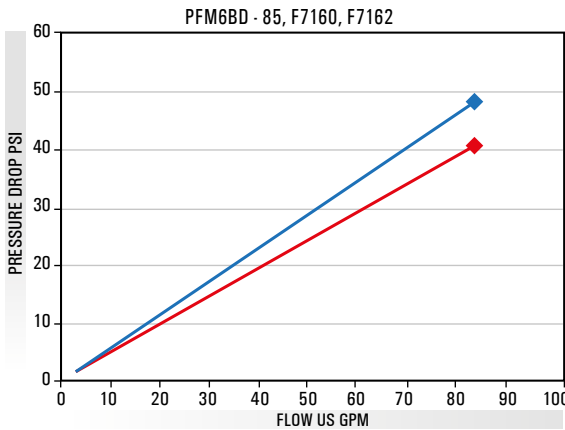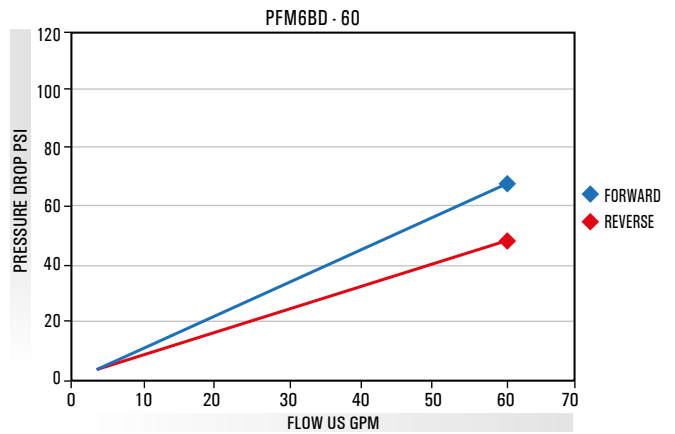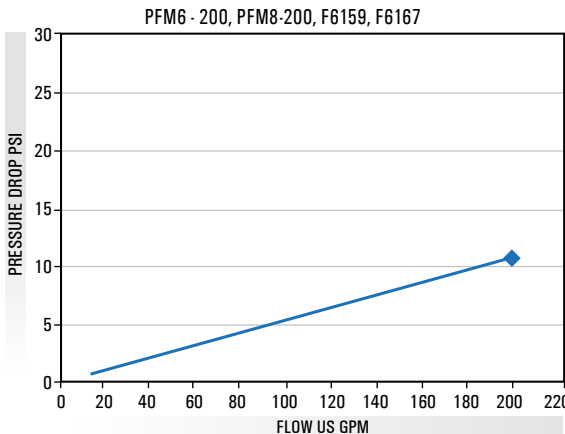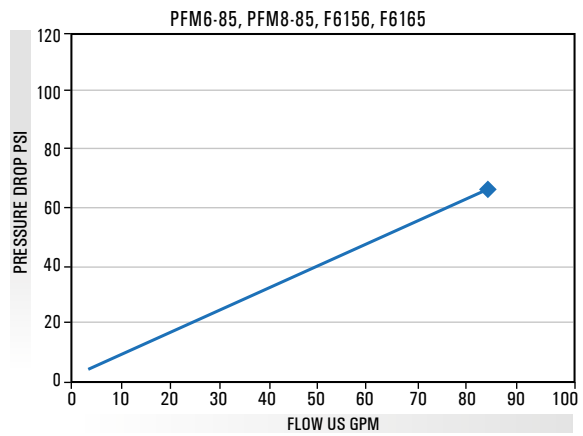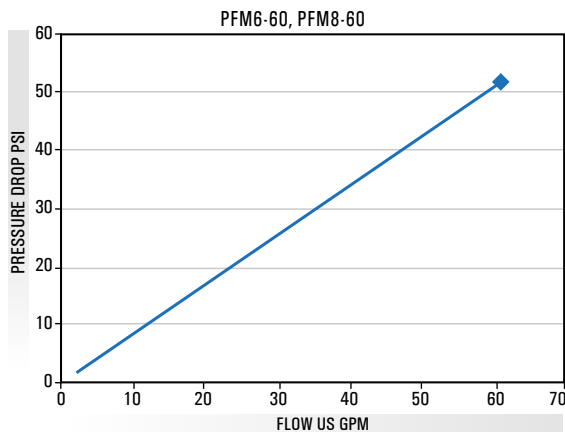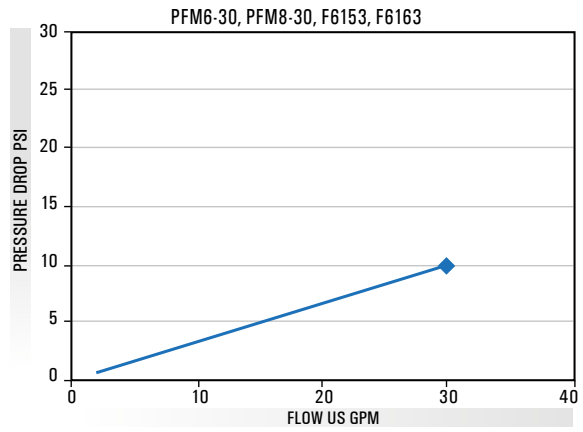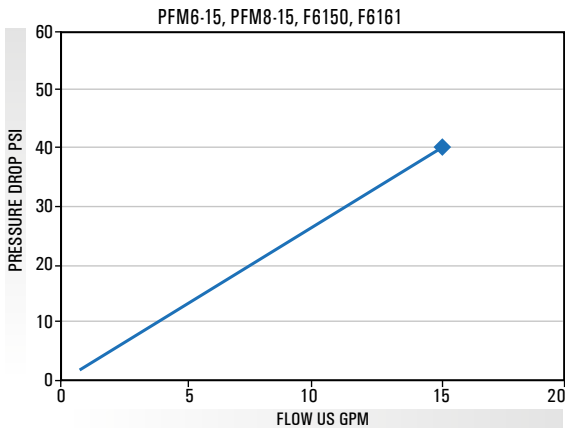

Turbine flow sensors

General design features

- 1 – Housing
- 2 – Turbine rotor
- 3 – Rotor supports
- 4 – Lock nut
- 5 – Magnetic pick-up (frequency output)
- 6 – Signal converter (analog output)
- 7 – Pressure port adapter
- 8 – Temperature port adapter
- 9 – Retaining rings

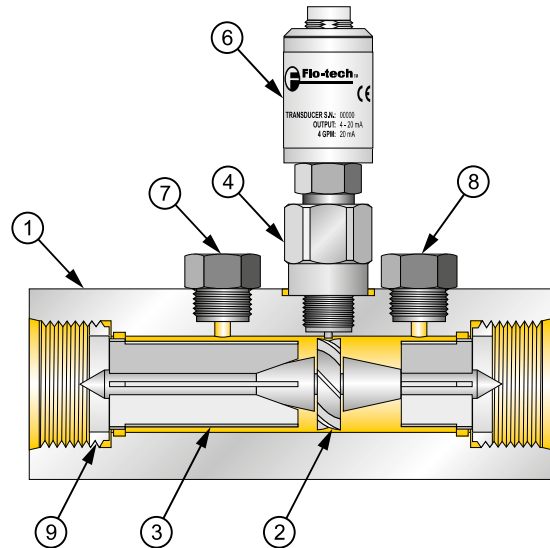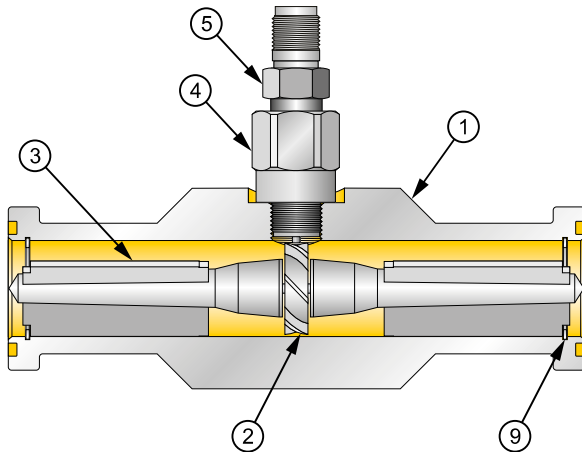

Operating principle

Turbine flow sensors measure the flow rate of hydraulic fluid and compatible liquids. As fluid flows through the sensor it turns the turbine rotor, and as the turbine blades pass the magnetic pick-up a frequency signal is generated. This frequency signal is proportional to the flow rate and can be transmitted to Flo-tech's digital displays or converted to an analog output. Optional sensors allow measurement of pressure and temperature.

Rugged construction: Flow sensors are constructed of anodized aluminum and Stressproof® steel with SAE, BSPP, code 61, and code 62, 4-bolt flanged ports. The flow sensors have a fluid temperature range of -4 to +300 °F, and are available in pressure ratings up to 6000 psi.

Flow straighteners: While flow straighteners are manufactured into each sensor, it is recommended that at least 10 port diameters of upstream pipe with no obstructions to the flow sensor and at least 5 port diameters downstream pipe be provided to obtain laminar flow.

Filtration: All applications should be filtered to at least 40 micron. Placing the flow sensor at a higher elevation in the system will avoid collection of debris, sediment, and dirt in the sensor.

Bi-directional flow capability: Turbine flow sensors are inherently bi-directional, as the turbine will function normally in reverse condition. Flo-tech does not guarantee accuracy in reverse flow. However, it is generally in the range of $\pm 1.5\%$ to $\pm 2\%$ full scale. If required, a reverse flow calibration is optional.

Accuracy: The flow sensors have a forward flow accuracy of $\pm 1\%$ full scale while monitoring hydraulic liquids with viscosity and specific gravity similar to factory calibrated fluids. Flow sensors that include the Intelligent Frequency Converter (IFC) are capable of even greater accuracy.

Repeatability: Flow sensor repeatability is within $\pm 0.2\%$. This is particularly important in cyclical applications which require consistent readings.

Linearization: When used with the Intelligent Frequency Converter (IFC) and/or Flo-tech digital displays, accuracy can be improved by up to 4 times through the linearization of 10 points of flow data.

Calibration: Flow sensors are calibrated with 0.876 specific gravity, 32 cSt (150 SUS) hydraulic oil, irrespective of final fluid use. Three points of calibration data are provided with each turbine flow sensor. Optional 5- and 10-point calibration certification is also available.

Viscosity: The functional range of the turbine flow sensors is approximately 2 to 110 cSt (25 to 500 SUS).

Activa sensor array

Simultaneously measures flow, pressure and temperature



- Four flow ranges
- Turbine flow measurement
- IFC converter with 4-20 mA or 0-5 VDC output for flow rate
- 4-20 mA output for temperature and pressure
- Pressures up to 400 bar (5800 psi)
- Temperatures up to 150 °C (300 °F)
- Available with SAE or BSPP ports
- Flow accuracy $\pm 1\%$ of reading @ 32 cSt
- Repeatability $\pm 0.2\%$

The Activa sensor array provides flow, temperature and pressure signals in a compact unit that requires only one hydraulic line break. Each sensor transmits an output signal that is easily integrated with PCs, PLCs, recorders or panel displays. Signals can also be transmitted to Flo-tech's F6700/F6750 series digital displays.

Typical applications include fluid characteristic measurement on test stands, stationary hydraulic system monitoring, feedback for hydraulic system control, advance warning of impending component failure and mobile hydraulic system diagnosis.

SPECIFICATIONS

Performance

Forward flow accuracy: $\pm 1\%$ of reading @ 32 cSt

Repeatability: $\pm 0.2\%$

Temperature¹:

Fluid -4 to +300 °F (-20 to +150 °C)

Ambient -4 to +131 °F (-20 to +55 °C)

Operating pressure: Up to 400 bar (5800 psi) maximum

Pressure drop: See ΔP charts on page 22

Readout accuracy: ± 1 digit

IFC signal converter:

	F to I	F to V
Power:	Loop powered, 6V	10 to 26 VDC
	insertion loss max	
	10 to 30 VDC	
	supply range	
Inputs:	Magnetic pick-up	Magnetic pick-up
Frequency	0 to 3500 Hz	0 to 3500 Hz
Trigger sensitivity	30 mV p-p	30 mV p-p
Frequency measurement		
accuracy	$\pm 1\%$	$\pm 1\%$
Analog output:	4-20 mA current	0-5 VDC
	loop	
Resolution	1:4000	1:4000
Temperature drift	50 ppm / °C max	50 ppm / °C max
Response	1.6 seconds min	1.6 seconds min

Environmental

Ambient temperature: -30 to +70 °C (-22 to +158 °F)

Storage temperature: -30 to +70 °C (-22 to +158 °F)

Humidity: 0-90%, non-condensing

Pressure sensor:

(optional)

See page 24 for complete specifications

Temperature sensor:

(optional)

See page 25 for complete specifications

Material

Housing: 6013-T351 aluminum; anodized

Turbine rotor: T416 stainless steel

Ball bearings: 440C stainless steel

Rotor shaft: T303 stainless steel

Rotor supports: 6061-T6 aluminum alloy

F6202 & F6222 CA360 brass

Hub cones:

F6204, F6206, F6208,

F6224, F6226 & F6228

only

Adapters:

6061-T6 aluminum; anodized

Retaining rings:

6061-T6 aluminum alloy

Seals:

Buna N standard; Viton® and EPR optional

IFC (includes magnetic

pick-up):

Pick-up body T303 stainless steel

Pick-up nut T303 stainless steel

IFC case 6061-T6 aluminum; nickel-plated

IFC connector Brass; nickel-plated

Ports:


SAE J1926/1; ISO1179 (BSPP)

¹When an optional pressure sensor is installed, the temperature range will be limited to the specifications for that device.

Activa sensor array

Simultaneously measures flow, pressure and temperature

DIMENSIONS

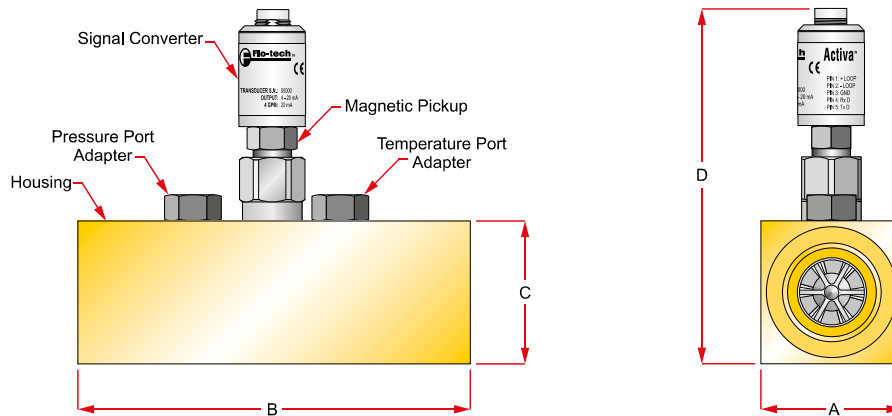

Model	A Width mm (inches)	B Length mm (inches)	C Height mm (inches)	D w/IFC mm (inches)	Weight kg (lbs)
F6202-A / F6222-A	32 (1.25)	120 (4.72)	38 (1.50)	131.5 (5.18)	0.73 (1.60)
F6204-A / F6224-A	38 (1.50)	129 (5.08)	51 (2.00)	138.7 (5.46)	0.86 (1.90)
F6206-A / F6226-A	51 (2.00)	149 (5.87)	58 (2.25)	154.2 (6.07)	1.27 (2.80)
F6208-A / F6228-A	64 (2.50)	173 (6.81)	64 (2.50)	161.8 (6.37)	1.91 (4.20)

ORDERING INFORMATION

Nominal port size	Flow range	Model number	Flow transducer	Seals	Temperature	Pressure
SAE 8	0.4 - 7 gal/min	F6202-A	I 4-20 mA out (IFC) V 0-5 VDC out (IFC)	B Buna N V Viton® E EPR	T with sensor N 1/4 NPTF (F) plugged S SAE 2 (J514) plugged G G 1/4 (F) plugged D SAE 4 plugged	1 69 bar (1000 psi) sensor 3 207 bar (3000 psi) sensor 5 345 bar (5000 psi) sensor 6 414 bar (6000 psi) sensor ² N 1/4 NPTF (F) plugged S SAE 2 (J514) plugged F G 1/4 (F) plugged ² Operating pressure rated to 5800 psi (400 bar) for models F6208 and F6228.
SAE 12	1 - 40 gal/min	F6204-A				
SAE 16	4 - 80 gal/min	F6206-A				
SAE 20	8 - 160 gal/min	F6208-A				
G 1/4	1.5 - 26 l/min	F6222-A				
G 3/4	3.8 - 151 l/min	F6224-A				
G 1	15 - 302 l/min	F6226-A				
G 1 1/4	30 - 605 l/min	F6228-A				

EXAMPLES:

F6204-AIB-T6 = SAE 12 ports
 2 - 40 gal/min flow range
 4-20 mA output
 Buna N seals
 Temperature sensor
 414 bar (6000 psi) pressure sensor

F6228-AVV-G5 = G 1-1/4 ports
 30 - 605 l/min flow range
 0-5 VDC output
 Viton® seals
 G 1/4 (F) plugged temp port
 345 bar (5000 psi) pressure sensor

ACCESSORIES

Model number	Description
F001109	5-point calibration certificate ³
F001110	10-point calibration certificate ³

³ Certificates are traceable to NIST, ISO 9001.

For information about	Refer to
Digital displays	Contact factory
Pressure sensors	Page 24
Temperature sensor	Page 25
Cables	Pages 26-27

Ultima sensor array

Simultaneously measures flow, pressure and temperature



- Four flow ranges
- Turbine flow measurement
- Standard magnetic pick-up with frequency output for flow rate
- 4-20 mA output for temperature and pressure
- Pressures up to 400 bar (5800 psi)
- Temperatures up to 150 °C (300 °F)
- Available with SAE or BSPP ports
- Flow accuracy $\pm 1\%$ of full scale
- Repeatability $\pm 0.2\%$

The Ultima sensor array provides flow, temperature and pressure signals in a compact unit that requires only one hydraulic line break. The magnetic pick-up generates a frequency output for flow rate measurement while the pressure and temperature sensors provide 4-20 mA output signals. The flow signals can be transmitted to Flo-tech's F6600/F6650 series, and the temperature and pressure signals can be transmitted to the F6700/F6750 series digital displays or any other instruments that accept a frequency or 4-20 mA signal.

Typical applications include fluid characteristic measurement on test stands, stationary hydraulic system monitoring, feedback for hydraulic system control, advance warning of impending component failure and mobile hydraulics system diagnosis.

SPECIFICATIONS


Performance

Forward flow accuracy:	$\pm 1\%$ of full scale ($\pm 1\%$ of rate when used with F6600/ F6650 display)
Repeatability:	$\pm 0.2\%$
Turbine response:	≤ 200 ms
Temperature:	
Fluid	-20 to +150 °C (-4 to +300 °F)
Ambient	-20 to +55 °C (4 to +131 °F)
Flow readout:	Linearity and zero shift ± 1 digit
Operating pressure:	Up to 400 bar (5800 psi) max
Pressure drop:	See ΔP charts on page 22
Readout accuracy:	± 1 digit
Magnetic pick-up:	
Electrical output signal	Self-generating alternating pulse 100 mV RMS (100 Hz) minimum
F6202 & F6222	10 mV RMS (200 Hz) minimum
Pressure sensor (optional):	See page 24 for complete specifications
Temperature sensor (optional):	See page 25 for complete specifications
Material	
Housing:	6013-T651 aluminum; anodized
Turbine rotor:	T416 stainless steel
Ball bearings:	440C stainless steel
Rotor shaft:	T303 stainless steel
Rotor supports:	6061-T6 aluminum alloy
F6202 & F6222	CA360 brass
Hub cones:	6061-T6 aluminum alloy
F6204, F6206, F6208, F6224, F6226 & F6228 only	
Adapters:	6061-T6 aluminum; anodized
Retaining rings:	6061-T6 aluminum alloy
Seals:	Buna N standard; Viton® and EPR optional
Magnetic pick-up:	
Body	T303 stainless steel
Nut	T303 stainless steel
Ports:	SAE J1926/1; ISO1179 (BSPP)

Ultima sensor array

Simultaneously measures flow, pressure and temperature

DIMENSIONS

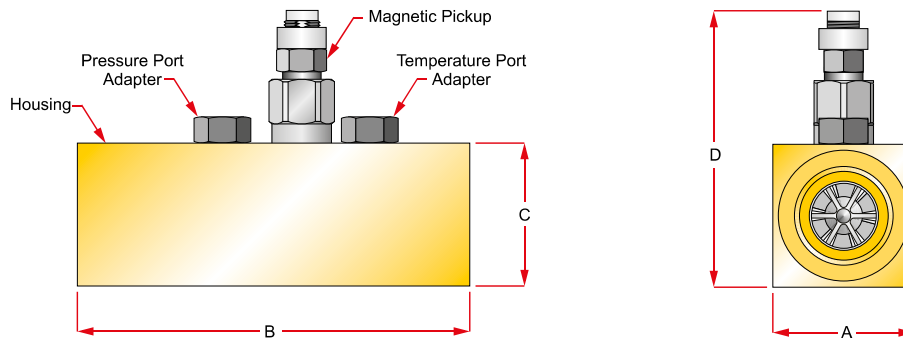

Model	A Width mm (inches)	B Length mm (inches)	C Height mm (inches)	D w/MAG mm (inches)	Weight kg (lbs)
F6202-F / F6222-F	32 (1.25)	120.0 (4.72)	38 (1.50)	94.5 (3.72)	0.70 (1.55)
F6204-F / F6224-F	38 (1.50)	129.0 (5.08)	51 (2.00)	102.9 (4.05)	0.79 (1.75)
F6206-F / F6226-F	51 (2.00)	149.0 (5.87)	58 (2.25)	113.3 (4.46)	1.25 (2.75)
F6208-F / F6228-F	64 (2.50)	173.0 (6.81)	64 (2.50)	120.7 (4.75)	1.86 (4.10)

ORDERING INFORMATION

Nominal port size	Flow range	Model number	Seals	Temperature	Pressure
SAE 8	0.4 - 7 gal/min	F6202-F ¹	B Buna N V Viton® E EPR	T with sensor N 1/4 NPTF (F) plugged S SAE 2 (J514) plugged G G 1/4 (F) plugged D SAE 4 Plugged	1 69 bar (1000 psi) sensor 3 207 bar (3000 psi) sensor 5 345 bar (5000 psi) sensor 6 414 bar (6000 psi) sensor ² N 1/4 NPTF (F) plugged S SAE 2 (J514) plugged F G 1/4 (F) plugged ² Operating pressure rated to 400 bar (5800 psi) for Models F6208 and F6228.
SAE 12	1 - 40 gal/min	F6204-F			
SAE 16	4 - 80 gal/min	F6206-F			
SAE 20	8 - 160 gal/min	F6208-F			
G 1/4	1.5 - 26 l/min	F6222-F ¹			
G 3/4	3.8 - 151 l/min	F6224-F			
G 1	15 - 302 l/min	F6226-F			
G 1 1/4	30 - 605 l/min	F6228-F			

¹ F6202-F and F6222-F require K-factor scaler F5140 (see page 23) to amplify frequency signal to be compatible with Flo-tech's F6600/F6650 digital displays.

EXAMPLES:

F6204-FB-T6 = SAE 12 ports
 2 - 40 gal/min flow range
 4-20 mA output
 Buna N seals
 Temperature sensor
 414 bar (6000 psi) pressure sensor

F6228-FV-G5 = G 1-1/4 ports
 30 - 605 l/min flow range
 0-5 VDC output
 Viton® seals
 G 1/4 (F) plugged temp port
 345 bar (5000 psi) pressure sensor

ACCESSORIES

Model number	Description
F001109	5-point calibration certificate ³
F001110	10-point calibration certificate ³

³ Certificates are traceable to NIST, ISO 9001.

For information about	Refer to
Digital displays	Contact factory
Pressure sensors	Page 24
Temperature sensor	Page 25
Cables	Pages 26-27

Classic turbine flow sensor

Simultaneously measures flow, pressure and temperature



- Choice of high strength aluminum or Stressproof® steel bodies
- Turbine flow measurement
- Flow accuracy $\pm 1\%$ of full scale
- Repeatability $\pm 0.2\%$
- Pressures up to 414 bar (6000 psi)
- Temperatures up to 150 °C (300 °F)
- Optional IFC converter provides analog output

Flo-tech's classic turbine flow sensors measure the flow rate of hydraulic fluids and other compatible liquids. Offered in a choice of high strength anodized aluminum or Stressproof® steel bodies, these durable flow sensors are capable of withstanding pressures up to 414 bar (6000 psi).

The classic series with the standard magnetic pick-up provides a frequency signal that is proportional to flow rate and can be transmitted to Flo-tech's F6600/F6650 Series digital displays. If an analog output is preferred, these sensors are also available with the IFC (Intelligent Frequency Converter) which offers either a 4-20 mA or 0-5 VDC output signal, allowing easy integration with Flo-tech's F6700/F6750 series digital displays, PCs, PLCs or other data acquisition devices.

SPECIFICATIONS

Performance


Forward flow accuracy:	$\pm 1\%$ of full scale ($\pm 1\%$ of rate when used with F6600/ F6650 display)	
Repeatability:	$\pm 0.2\%$	
Turbine response:	≤ 200 ms	
Temperature:		
Fluid	-20 to +150 °C (-4 to +300 °F)	
Ambient	-20 to +55 °C (-4 to +131 °F)	
Operating pressure:		
FSC, FSB series	345 bar (5000 psi) maximum	
FSD series	414 bar (6000 psi) maximum	
Pressure drop:	See ΔP charts on page 22	
Magnetic pick-up:		
Electrical output signal	Self-generating alternating pulse 100 mV RMS (100 Hz) minimum	
	10 mV RMS (200 Hz) minimum	
IFC signal converter (optional):	F to I	F to V
Power:	Loop powered, 6V insertion loss max 10 to 30 VDC sup- ply range	10 to 26 VDC
Inputs:	Magnetic pick-up 0 to 3500 Hz Trigger sensitivity 30 mV p-p Frequency measurement accuracy	Magnetic pick-up 0 to 3500 Hz 30 mV p-p $\pm 1\%$
Analog output:	4-20 mA current loop 1:4000 Temperature drift 50 ppm / °C max Response 1.6 seconds min	0-5 VDC 1:4000 50 ppm / °C max 1.6 seconds min
Environmental		
Ambient temperature	-30 to +70 °C (-22 to +158 °F)	-30 to +70 °C (-22 to +158 °F)
Material		
Housing:		
FSD series	6013-T651 aluminum; anodized Stressproof® steel; zinc plate, dichromate finish	
Turbine rotor:	T416 stainless steel	
Bearings:	440C stainless steel ball bearings Tungsten carbide journal bearings	
Rotor shaft:	T303 stainless steel	
Rotor supports:	6061-T6 aluminum alloy	
FSC-375, 500, 750	CA360 brass	
FSD series	T303 stainless steel	
Hub cones:	6061-T6 aluminum; anodized	
FSC-500, 750, 1000, 1005 & FSB-1250, 1500 only		
Retaining rings:	Steel; zinc plate T303 stainless steel	
FSC-375 series		
Seals:	Buna N standard; Viton® and EPR optional	
Magnetic pick-up:		
Body	T303 stainless steel	
Nut	T303 stainless steel	
IFC (includes magnetic pick-up), optional:		
Case	6061-T6 aluminum; nickel plate	
Connection	Brass; nickel plate	
Ports:	SAE J1926/1, code 61 and code 62: SAE J518	

Classic turbine flow sensor


Simultaneously measures flow, pressure and temperature

DIMENSIONS

FSC

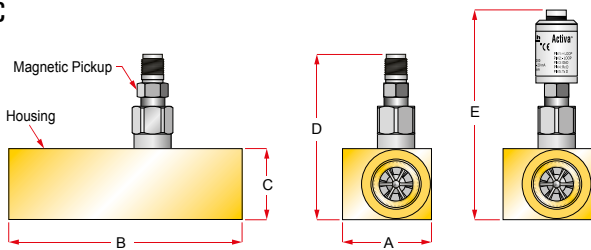


FSB

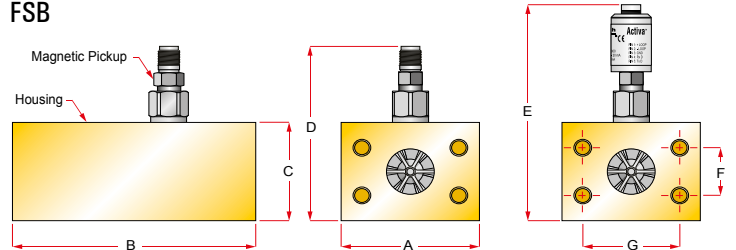

Series	A Width mm (inches)	B Length mm (inches)	C Height mm (inches)	D w/MAG mm (inches)	E w/IFC mm (inches)	F mm (inches)	G mm (inches)	Weight ¹ kg (lbs)
FSC-375	32 (1.25)	127 (5.00)	38 (1.50)	99 (3.91)	139 (5.48)	-	-	0.57 (1.25)
FSC-500	51 (2.00)	165 (6.50)	51 (2.00)	106 (4.16)	148 (5.84)	-	-	1.25 (2.75)
FSC-750	51 (2.00)	165 (6.50)	51 (2.00)	108 (4.25)	151 (5.93)	-	-	1.30 (2.87)
FSC-1000	64 (2.50)	165 (6.50)	51 (2.00)	110 (4.34)	152 (5.97)	-	-	1.47 (3.25)
FSC-1005	64 (2.50)	165 (6.50)	51 (2.00)	110 (4.34)	152 (5.97)	-	-	1.47 (3.25)
FSB-1250	102 (4.00)	178 (7.00)	76 (3.00)	126 (4.94)	165 (6.43)	30.1 (1.188)	58.7 (2.312)	3.52 (7.75)
FSB-1500	102 (4.00)	178 (7.00)	76 (3.00)	130 (5.10)	167 (6.59)	35.7 (1.406)	69.9 (2.75)	3.36 (7.40)
FSD-1250	54 (2.12)	190 (7.50)	54 (2.125)	114 (4.50)	131 (5.17)	-	-	2.78 (6.12)
FSD-1500	64 (2.50)	190 (7.50)	64 (2.500)	123 (4.85)	135 (5.34)	-	-	3.06 (6.75)
FSD-2000	79 (3.12)	209 (8.25)	79 (3.125)	137 (5.39)	138 (5.45)	-	-	3.88 (8.55)

¹ Weight is for sensors with standard magnetic pick-up installed. For sensors with IFC add .10 lbs.

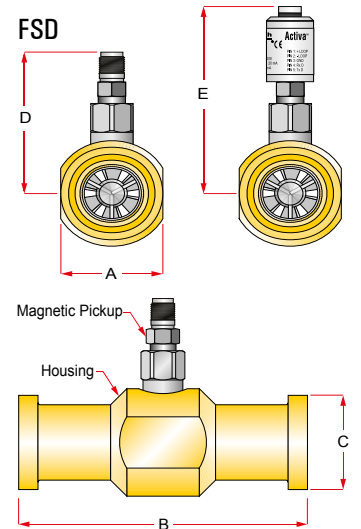

ORDERING INFORMATION

Nominal port size	Flow range l/min (gal/min)	Series	Model number frequency output	Model number 4-20 mA output	Model number 0-5 VDC output
SAE 8	1.5 - 26 (0.4 - 7)	FSC-375	F2945-ASCM ²	F2945-ASCI	F2945-ASCV
SAE 12	4 - 56 (1 - 15)	FSC-500	F2082-ASCM	F2082-ASCI	F2082-ASCV
SAE 12	7.5 - 94 (2 - 25)	FSC-750	F2083-ASCM	F2083-ASCI	F2083-ASCV
SAE 16	11.5 - 227 (3 - 60)	FSC-1000	F2084-ASCM	F2084-ASCI	F2084-ASCV
SAE16	15 - 321 (4 - 85)	FSC-1005	F2084-ASCM8	F2084-ASCI8	F2084-ASCV8
SAE 20, code 61, 4-bolt face	20 - 378 (5 - 100)	FSB-1250	F2085-ASBM	F2085-ASBI	F2085-ASBV
SAE 24, code 61, 4-bolt face	27 - 757 (7 - 200)	FSB-1500	F2086-ASBM	F2086-ASBI	F2086-ASBV
SAE 20, code 62, flange head	20 - 378 (5 - 100)	FSD-1250	F2085-SCDM	F2085-SCDI	F2085-SCDV
SAE 24, code 62, flange head	27 - 757 (7 - 200)	FSD-1500	F2086-SCDM	F2086-SCDI	F2086-SCDV
SAE 32, code 62, flange head	37 - 1324 (10 - 350)	FSD-2000	F2998-SCDM	F2998-SCDI	F2998-SCDV

² FSC-375 (F2945-ASCM) requires K-factor scaler F5140 (see page 23) to amplify frequency signal to be compatible with Flo-tech's F6600/F6650 digital displays.

EXAMPLES:

F2084-ASCM = SAE 16 ports
11.5 - 227 l/min (3 - 60 gal/min)
Frequency output
Buna N seals

F2086-ASBI = SAE 24, Code 61, 4-bolt face ports
27 - 757 l/min (7 - 200 gal/min)
4-20 mA output
Buna N seals

ACCESSORIES

Model number	Description
F001109	5-point calibration certificate ³
F001110	10-point calibration certificate ³

³ Certificates are traceable to NIST, ISO 9001.

For information about	Refer to
Digital displays	Contact factory
Pressure sensors	Page 24
Temperature sensor	Page 25
Cables	Pages 26-27

Quad series turbine flow sensor

Provides bi-directional flow rate measurement



- Four flow ranges
- Bi-directional turbine flow measurement
- High strength aluminum bodies
- Flow accuracy $\pm 1\%$ of full scale for both forward and reverse flow
- Repeatability $\pm 0.2\%$
- Pressures up to 345 bar (5000 psi)
- Temperatures up to 150 °C (300 °F)

Derived from the FSC Series, the F2000 Quad series of flow sensors utilizes two flow transducers which are 90 degrees electrically out of phase from each other. With the addition of a second flow transducer, it is possible to monitor flow in both directions. The F2000 Quad is suitable for up-down counters that can discern the leading and trailing edges of the quadrature signals.

Current applications include using the F2000 as a speed-sensing device on mobile equipment. This bi-directional flow sensor can be used as a governor, sending frequency signals back to a PLC which enable it to make the necessary adjustments. Other functions of the flow sensor are in linear applications where accurate positioning is required.

SPECIFICATIONS

Performance

Forward and reverse flow

Accuracy	$\pm 1\%$ of full scale
Repeatability	$\pm 0.2\%$
Turbine response	≤ 200 ms

Temperature:

Fluid	-20 to +150 °C (-4 to +300 °F)
Ambient	-20 to +55 °C (-4 to +131 °F)

Operating pressure:

345 bar (5000 psi) maximum

Pressure drop:

See ΔP charts on page 22

Magnetic pick-up:

Electrical output signal	Self-generating alternating pulse 100 mV RMS (100 Hz) minimum
--------------------------	---

Material

Housing:

FSD series	6013-T651 aluminum; anodized Stressproof® steel; zinc plate, dichromate finish
------------	--

Turbine rotor:

T416 stainless steel

Ball bearings:

440C stainless steel ball bearings

Rotor shaft:

T303 stainless steel

Rotor supports:

FSC-2005, 2075	6061-T6 aluminum alloy
----------------	------------------------

CA360 brass

Hub cones:

6061-T6 aluminum alloy

Retaining rings:

Steel; zinc plate

FSC-375 series

Seals:

Buna N standard

Magnetic pick-up:

Body	T303 stainless steel
------	----------------------

Nut T303 stainless steel


Ports:

SAE J1926/1

Quad series turbine flow sensor

Provides bi-directional flow rate measurement

DIMENSIONS

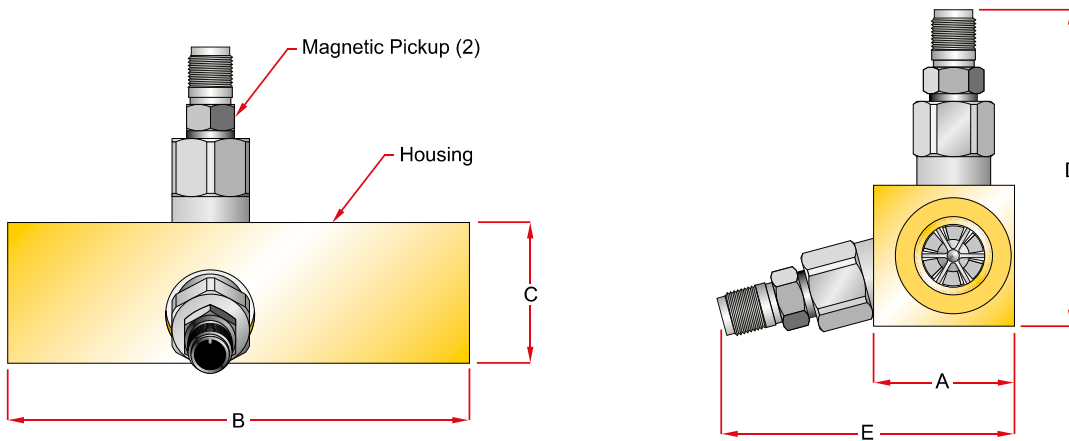

Series	A Width mm (inches)	B Length mm (inches)	C Height mm (inches)	D w/MAG mm (inches)	E w/MAG mm (inches)	Weight kg (lbs)
FSC-2005	51 (2.00)	165 (6.50)	51 (2.00)	106 (4.16)	102 (4.05)	1.25 (2.75)
FSC-2075	51 (2.00)	165 (6.50)	51 (2.00)	108 (4.25)	102 (4.05)	1.30 (2.87)
FSC-2100	64 (2.50)	165 (6.50)	51 (2.00)	110 (4.34)	117 (4.59)	1.47 (3.25)
FSC-2150	64 (2.50)	165 (6.50)	51 (2.00)	110 (4.34)	117 (4.59)	3.52 (7.75)

ORDERING INFORMATION

Nominal port size	Flow range l/min (gal/min)	Series	Model
SAE 12	4 - 56 (1 - 15)	FSC-2005	F2082-ASCQ4
SAE 12	7.5 - 94 (2 - 25)	FSC-2075	F2083-ASCQ4
SAE 16	11.5 - 227 (3 - 60)	FSC-2100	F2084-ASCQ4
SAE 16	15 - 321 (4 - 85)	FSC-2150	F2085-ASCQ4

EXAMPLES:

F2084-ASCQ4 = SAE 16 ports
 11.5 - 227 l/min (3 - 60 gal/min)
 Bi-directional frequency output
 Buna N seals

ACCESSORIES

Model number	Description
F001109	5-point calibration certificate ¹
F001110	10-point calibration certificate ¹



For information about	Refer to
Digital displays	Contact factory
Cables	Pages 26-27

¹ Certificates are traceable to NIST, ISO 9001.



Flow vs pressure drop charts

Turbine flow sensors



Activa and Ultima sensor arrays

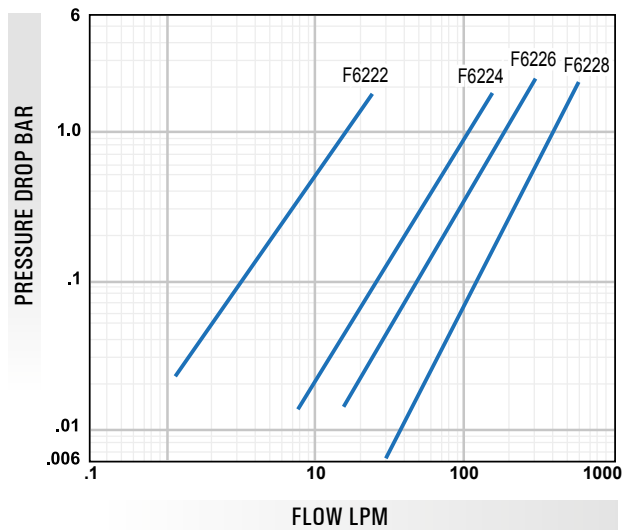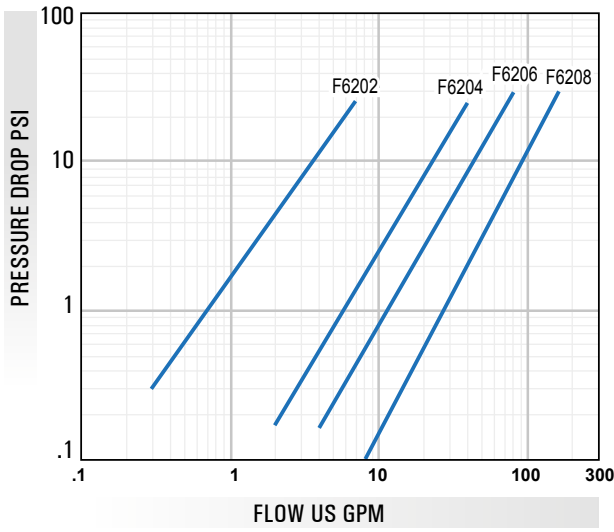

Classic flow sensors

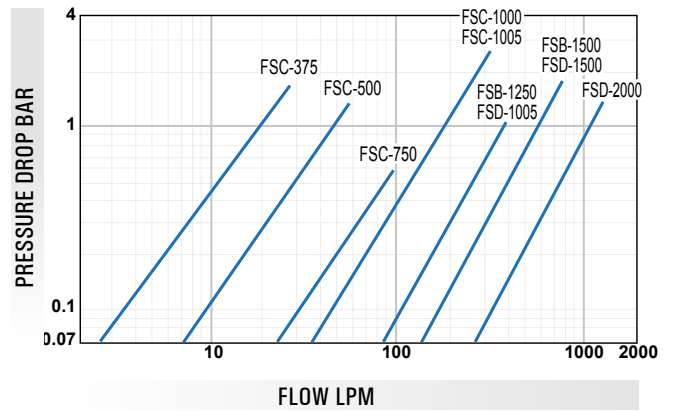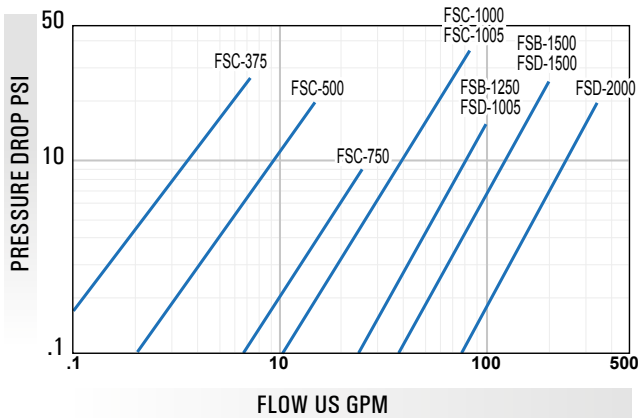

Quad flow sensors

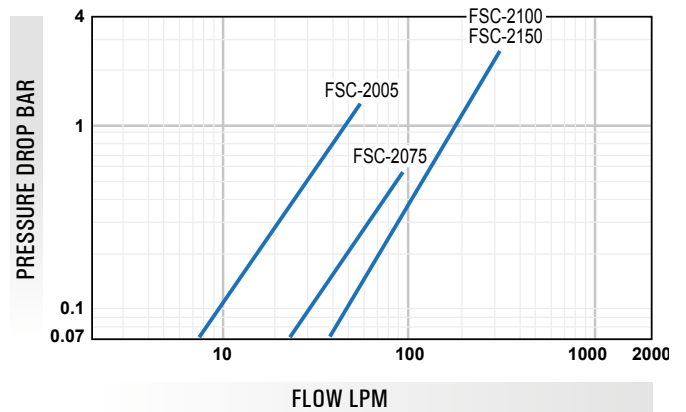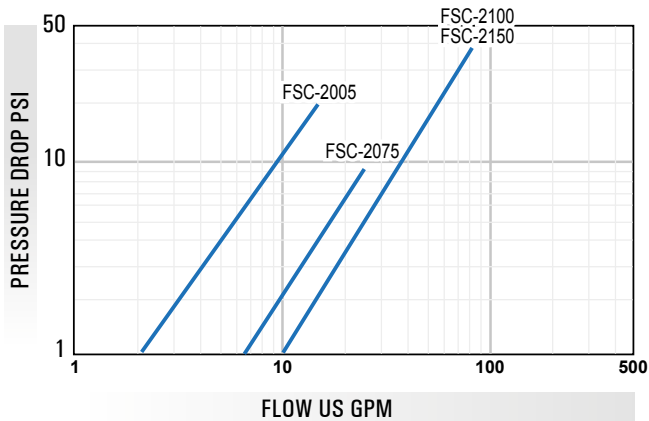

K-factor scaler

Frequency divider



- Pre-amplifier for low level turbine meter
- Interface for pulse output devices to PLC, RTU, PC data acquisition card or similar devices
- Scale turbine meter output to desired engineering units
- On board microcontroller
- Internal or external pull-up resistor
- Compact ABS enclosure with mounting flanges
- Field adjustable (with optional software)
- K-factor range 1- 999,999,999

The K-factor scaler is a field adjustable frequency divider that converts the low level frequency output from a turbine meter into a scaled square wave output signal. This amplified, square wave output signal will interface with any frequency or counter input data collection device.

Due to the low level frequency signal of the FSC-375 and the Ultima F6202-F and F6222-F series turbine meters, the K-factor scaler is required to amplify the signal of these turbine meters for transmission to the Flo-tech F6600 and F6650 series digital displays.

The K-factor scaler is also capable of converting the frequency output of a turbine meter into a different frequency, representing another unit of measure, such as liters, barrels, cubic feet, etc. This requires the optional programming software kit and the K-factor information unique to the turbine meter.

ORDERING INFORMATION

Model	Part number
K-factor scaler	F5140
Programming software kit	F5141

SPECIFICATIONS

External power:

Input voltage maximum: 8.5 to 30 VDC, diode protected
 Current draw: 18 mA, using internal resistor @ 30 VDC input

Inputs:

Frequency range: 0-4000 Hz
 Trigger sensitivity: 30 mV p-p to 30 V p-p

Output signal:

30 VDC max voltage (open collector transistor) 0.25 W max power

Pulse type, using internal pull-up resistor;

$$V_H = \text{power input voltage} - 0.7 \text{ VDC}$$

$$V_L = \text{less than } 0.4 \text{ V @ max input power}$$

Pulse type, using external pull-up resistor;

$$V_H = \text{input voltage to external pull-up resistor}$$

$$V_L = [V_H / (\text{selected resistor value} + 47\Omega)] \times 47\Omega$$

Pulse length;



150µs, 1ms, 25ms, 100ms, 500ms, 1s or automode selectable

Internal pull-up resistor: Jumper disable option 3.6K Ω finish

Operating temperature: -30 to +70 °C (-22 to +158 °F)

Enclosure: UL 94-5VA flame retardant ABS with

DIMENSIONS - Inches (mm)

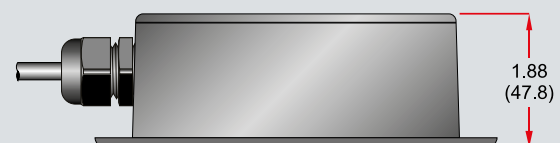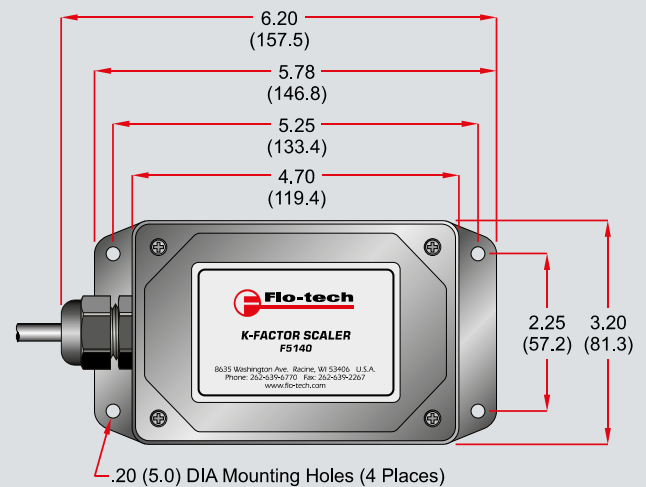

Pressure sensor F6301 series

With 4-20 mA output



- 4-20 mA electrical output
- Long-term stability & repeatability
- Wide range of pressure ratings
- Stainless steel NEMA 4X enclosure

The F6301 pressure sensors utilize polysilicone strain resistors to create very low noise levels with very high signal output. The metal diaphragm and polysilicone bridge are unaffected by shock, vibration or mounting position.

ORDERING INFORMATION

Part number	psi	bar	kg/cm ²
F6301-15	0 - 15	0 - 1.034	0 - 1.055
F6301-30	0 - 30	0 - 1.999	0 - 1.999
F6301-60	0 - 60	0 - 4.13	0 - 4.22
F6301-100	0 - 100	0 - 6.89	0 - 7.03
F6301-150	0 - 150	0 - 10.34	0 - 10.55
F6301-200	0 - 200	0 - 13.78	0 - 14.06
F6301-300	0 - 300	0 - 19.99	0 - 19.99
F6301-500	0 - 500	0 - 34.5	0 - 35.1
F6301-750	0 - 750	0 - 51.7	0 - 52.7
F6301-1K	0 - 1000	0 - 68.9	0 - 70.3
F6301-2K	0 - 2000	0 - 137.8	0 - 140.6
F6301-3K	0 - 3000	0 - 199.9	0 - 199.9
F6301-5K	0 - 5000	0 - 345	0 - 351
F6301-6K	0 - 6000	0 - 414	0 - 422
F6301-7.5K	0 - 7500	0 - 517	0 - 527
F6301-10K	0 - 10,000	0 - 689	0 - 703
F6301-15K	0 - 15,000	0 - 1034	0 - 1055

SPECIFICATIONS

Overpressure:

Full scale in psi	0-15 to 0-2000	0-3000 to 0-5000	0-6000 to 0-15,000
Proof	200%	150%	120%
Burst	800%	300%	150%

Accuracy:

±1% of full scale
Non-linearity ±0.7%
Hysteresis ±0.2%
Non-repeatability ±0.07%

Durability:

108 cycles 20/80% full scale with negligible performance change

Response time:

< 5ms

Environmental effects:

Humidity: No performance effect at 95% relative humidity, non-condensing
Position effect: < 0.01% full scale

Temperature:

Storage	-54 to +121 °C (-65 to +250 °F)
Operating	-29 to +82 °C (-20 to +180 °F)
Compensating	-29 to +71 °C (-20 to +160 °F)

Thermal coefficients (68 °F ref.) % full scale / °F standard:

Zero	±0.04%
Span	±0.04%

Vibration sweep:

< ± 0.1% full scale effect for 0-2000 Hz at 20 g's in any axis

Shock:

< ± 0.5% full scale effect for 100 g's, 20 ms shock in any axis

Power requirements:


10-36 VDC unregulated 4-20 mA reverse polarity protected

Circuit to case insulation resistance:

100 M Ohms @ 50 VDC

Electrical output:

Signal 4-20 mA (2 wire)

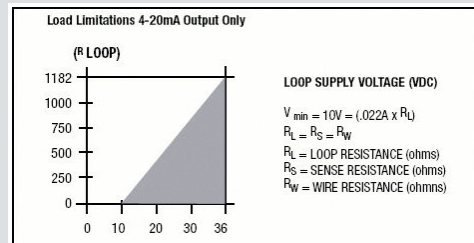


Physical:

Enclosure	NEMA 4X
Weight	2 oz (approximate without cable)

Materials:

Case	300 series stainless steel
Cable	#24 AWG, 36" PVC, shielded, vented, UL approved
Diaphragm	17-4 PH stainless steel
Connection	1/4 NPT male

DIMENSIONS - Inches (mm)

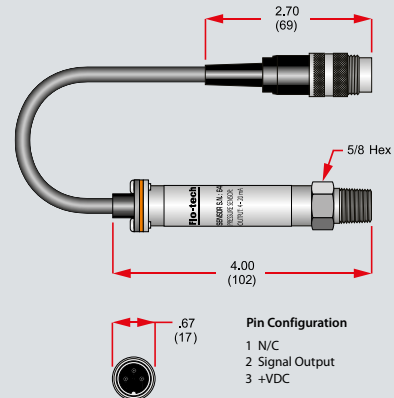

Temperature sensor F6310 series

With 4-20 mA output



- RTD temperature element
- 4-20 mA electrical output
- Temperatures up to +176 °C (+350 °F)
- Withstands pressures up to 414 bar (6000 psi)

These two-wire platinum RTD (resistance temperature detector) sensors with 4-20 mA output are designed for direct insertion into high pressure fluid systems without need for special pressure fittings. They are ideal for indicating system operating conditions, temperature testing and process measurements and control.

ORDERING INFORMATION

Part number	Fluid temperature range
F6310	-40 to +177 °C (-40 to +350 °F)

Sensor accuracy vs temperature

Combined Celsius / Fahrenheit			Celsius only		Fahrenheit only	
Temperature	Accuracy	Temp.	Accuracy	Temp.	Accuracy	
°C	°F	°C	°C	°F	°F	
-20	-4	±0.8	-20	±0.8	-4	±1.4
0	+32	±0.6	0	±0.6	0	±1.2
+100	+212	±1.2	+50	±0.9	+50	±1.2
+176	+350	±1.7	+100	±1.2	+100	±1.5
-	-	-	+150	±1.5	+200	±2.1
-	-	-	+176	±1.7	+300	±2.7
-	-	-	-	-	+350	±3.0

SPECIFICATIONS

Temperature range:

Ambient	-40 to +85 °C (-40 to +185 °F)
Fluid	-40 to +177 °C (-40 to +350 °F)

Accuracy:

See sensor accuracy vs temperature chart below

Response time:

3 seconds


Maximum pressure:

414 bar (6000 psi)

Operating loop voltage:

Minimum	9V + Voltage of load resistor at 20 mA
Maximum	28V
Min. load resistance	10 Ω
Max. load resistance	$\frac{\text{Loop voltage} - 9V}{20 \text{ mA}} = \Omega$
(including wiring losses)	20 mA

DIMENSIONS - Inches (mm)

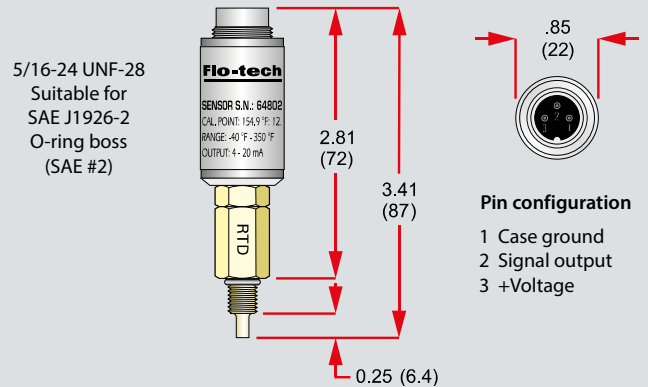

Cables




Flo-tech offers a complete selection of mating cables to complete your hydraulic measurement system.

To select the appropriate cable for your application, refer to the Connecting Cable Charts shown below and on the next page.


	Sensor model	Connecting cable	Connecting ends	Signal amplifier	Digital display
Frequency	FSC-375	F2832-6, 2 m (6 ft) or F2832-15, 4.5 m (15 ft)	MS female to tinned leads	F5140 K-factor scaler	F6600 / F6650 series
	FSC-500	F2832-6, 2 m (6 ft) or F2832-15, 4.5 m (15 ft)	2-pin (MS) female to tinned leads	—	F6600 / F6650 series or HB2800 series
	FSC-750				
	FSC-1000				
	FSC-1005				
	FSB-1250				
	FSB-1500				
	FSD-1250				
	FSD-1500				
	FSD-2000				
	F6202-F / F6222-F	F6234-6, 2 m (6 ft) or F6234-15, 4.5 m (15 ft)	3-pin female to tinned leads	F5140 K-factor scaler	F6600 / F6650 series or HB2800 series
	F6204-F / F6224-F	F6234-6, 2 m (6 ft) or F6234-15, 4.5 m (15 ft)	3-pin female to tinned leads	—	F6600 / F6650 series
	F6206-F / F6226-F				
F6208-F / F6228-F					
Analog	FSC-375 with IFC	F6557-6, 2 m (6 ft) or F6557-15, 4.5 m (15 ft)	5-pin female to tinned leads	—	F6700 / F6750 series
	FSC-500 with IFC				
	FSC-750 with IFC				
	FSC-1000 with IFC				
	FSC-1005 with IFC				
	FSB-1250 with IFC				
	FSB-1500 with IFC				
	FSD-1250 with IFC				
	FSD-1500 with IFC				
	FSD-2000 with IFC				
	F6202-AI / F6222-AI F6202-AV / F6222-AV	F6557-6, 2 m (6 ft) or F6557-15, 4.5 m (15 ft)	5-pin female to tinned leads	—	F6700 / F6750 series
	F6204-AI / F6224-AI F6204-AV / F6224-AV				
	F6206-AI / F6226-AI F6206-AV / F6226-AV				
F6208-AI / F6228-AI F6208-AV / F6228-AV					
F6301-X (Pressure sensors)	F6234-6, 2 m (6 ft) or F6234-15, 4.5 m (15 ft)	3-pin female to tinned leads	—	F6700 / F6750 series	
F6310 (Temperature sensor)	F6234-6, 2 m (6 ft) or F6234-15, 4.5 m (15 ft)	3-pin female to tinned leads	—	F6700 / F6750 series	

Cables


2-pin (MS) and 3-pin connectors for frequency flow signals

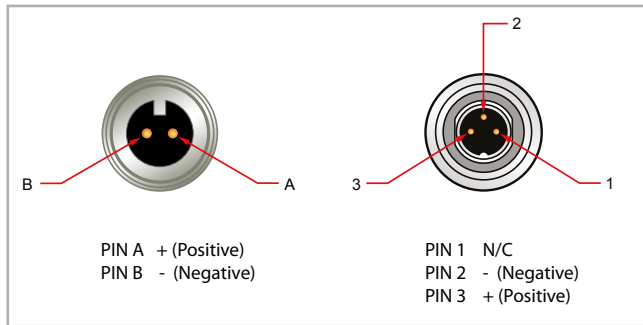

3-pin connectors for analog pressure and temperature signals

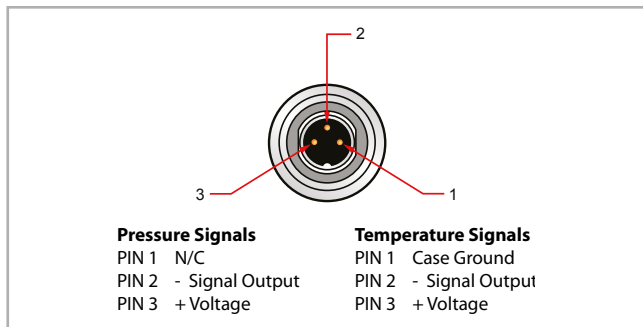

5-pin connector for analog flow signals

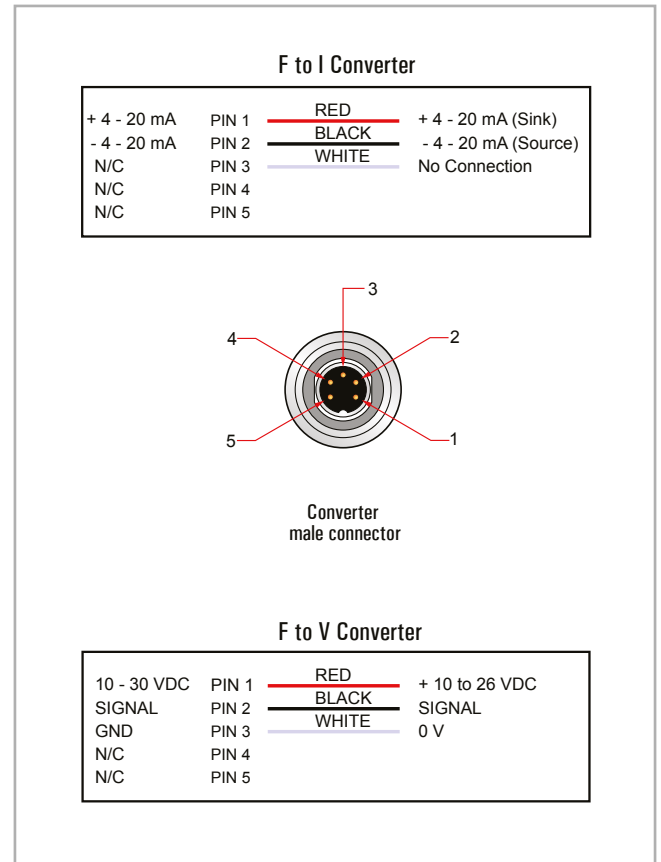

	Sensor model	Connecting cable	Connecting ends	Signal amplifier	Digital display
Frequency	F6150-F	F2832-6, 2 m (6 ft) or F2832-15, 4.5 m (15 ft)	2-pin (MS) female to tinned leads	—	F6600 / F6650 series or HB2800 series
	F6153-F				
	F6156-F				
	F6159-F				
	F6161-F				
	F6163-F				
	F6165-F				
	F6167-F				
Analog	F6150-I and F6150-V	F6557-6, 2 m (6 ft) or F6557-15, 4.5 m (15 ft)	5-pin female to tinned leads	—	F6700 / F6750 series
	F6153-I and F6153-V				
	F6156-I and F6156-V				
	F6159-I and F6159-V				
	F6161-I and F6161-V				
	F6163-I and F6163-V				
	F6165-I and F6165-V				
	F6167-I and F6167-V				
	F6301-X (Pressure sensors)	F6234-6, 2 m (6 ft) or F6234-15, 4.5 m (15 ft)	3-pin female to tinned leads	—	F6700 / F6750 series
	F6310 (Temperature sensor)	F6234-6, 2 m (6 ft) or F6234-15, 4.5 m (15 ft)	3-pin female to tinned leads	—	F6700 / F6750 series


MC4000 diagnostic test equipment

Simultaneously measures flow, pressure, temperature and speed




- Handheld hydraulic analyzer offers instant and recordable diagnostics
- Hydraulic horsepower calculation
- Measures fast transients
- Flow sensor linearization
- 2.5 MB data logging capacity
- Five sensor inputs, including:
 - Turbine flow sensor
 - Two pressure sensors
 - Temperature sensor
 - RPM speed indicator

ORDERING INFORMATION

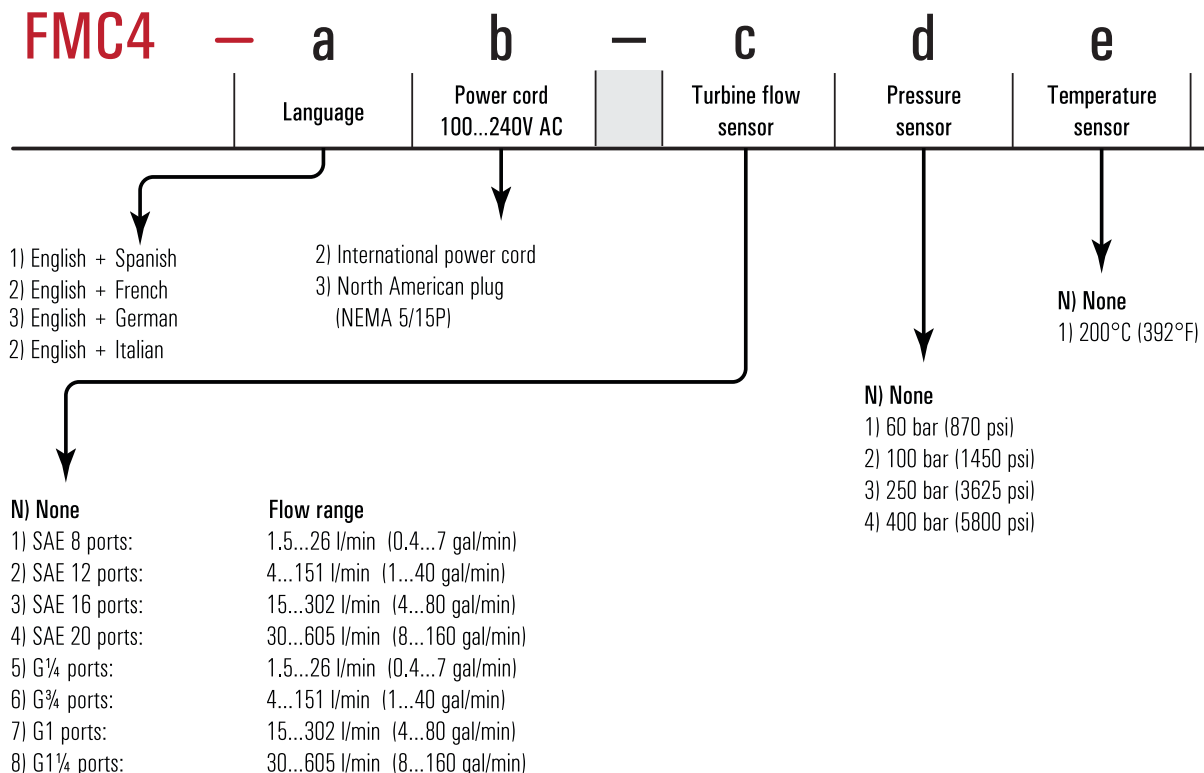

DIMENSIONS - Inches (mm)

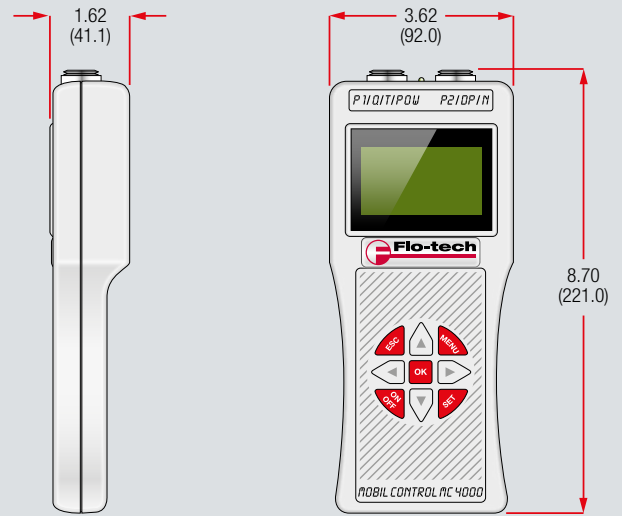

ACCESSORIES

A comprehensive set of accessories is available for the MC4000. Use these accessories to expand the capabilities of the MC4000.

Hydraulic formulas and viscosity information

Flow rate formulas

$$\text{Frequency (Hz)} = \frac{K \times \text{gal/min}}{60} \qquad \text{gal/min} = \frac{\text{Hz} \times 60}{K}$$

$$K \text{ factor (K)} = \frac{\text{Hz} \times 60}{\text{gal/min}} \qquad \text{Time base (TB)} = \frac{\text{gal/min}}{\text{Hz}}$$

Flow rate related formulas

$$\text{Valve } C_v \text{ factor} = \frac{\text{Flow rate (gal/min)} \times \sqrt{\text{Fluid specific gravity}}}{\sqrt{\Delta P \text{ across valve (psi)}}$$

$$\text{Cylinder velocity} = \frac{0.3208 \times \text{Flow rate (gal/min)}}{\text{Net cylinder area (in}^2\text{)}}$$

$$\text{Fluid motor torque} = \frac{\text{Flow rate (gal/min)} \times \text{Pressure (psig)} \times 36.77}{\text{Rotational speed}}$$

Power calculations

$$\text{H.P.} = \frac{\text{gal/min} \times \text{psi}}{1714} \qquad \text{H.P.} = \frac{\text{l/min} \times \text{bar}}{447.4} \qquad \text{kW} = \frac{\text{l/min} \times \text{bar}}{600}$$

Fluid viscosity conversion table

	Saybolt Universal Seconds (SUS)	ISO-VG	CentiStoke	CentiPoise	Typical brands/Liquids at 100 °F
	31	2	1.0	0.876	Water
	35	3	2.5	2.19	-
	40	5	4.2	3.68	-
	45	5/7	5.9	5.17	-
	50	7	7.5	6.57	Kerosene
	55	7/10	8.8	7.71	Atlantic Richfield/Duro 55 hydraulic oil
	60	10	10.5	9.20	Monsanto/Skydrol - 500 A
	70	10/15	13.2	11.56	Mobil/Aero HFA hydraulic oil
	80	15	15.7	13.75	No. 4 fuel oil
	90	22	18.2	15.94	Stauffer chemical/Fyrquel 90
	100	22	20.6	18.05	Conoco/Syncon synthetic AW hydraulic oil
	150	32	32.0	28.03	Mobil/DTE 24 hydraulic oil
	200	46	43.2	37.84	Citco/Glycol FR-40XD (oil in water)
	300	68	65.0	56.94	SAE 20 crankcase oil
	400	68/100	86.0	75.34	Sunoco/Sunvis 41 hydraulic oil
	500	100	108	94.61	SAE 30 crankcase oil
	750	150	162	141.91	SAE 40 crankcase oil
	1000	220	216	189.22	Mobil/Paper machine oil type K
	1500	320	323	282.95	SAE 50 crankcase oil
	2000	460	431	377.56	Amoco/American industrial oil - n°. 460
	3000	680	648	567.65	SAE 140 gear oil
	4000	1000	862	755.11	SAE 250 gear oil

£ CentiPoise are given for oil of 0.876 specific gravity. Relationship: CentiStokes × Specific gravity = CentiPoise



Badger Meter Europa

innovative. precise. sustainable.



Every drop counts.

Badger Meter Europa GmbH

Nürtinger Str. 76
72639 Neuffen
Germany
Tel. +49-70 25-92 08-0
Fax +49-70 25-92 08-15
badger@badgermeter.de
www.badgermeter.de

For Switzerland

Badger Meter Swiss AG
Mittelholzerstr. 8
3006 Bern
Schweiz
Tel. +41-31-93 20 111
Fax +41-31-93 10 867
info@badgermeter.ch
www.badgermeter.ch

For the USA and Canada

Badger Meter, Inc.
P.O. Box 245036
Milwaukee, WI 53224-9536
USA
Tel. +1-414-355-0400
Fax +1-414-355-7499
infocentral@badgermeter.com
www.badgermeter.com

For Asia

Badger Meter Europa GmbH
Singapore Branch
80 Marine Parade Road
#21-06 Parkway Parade
Singapore 449269
Tel. +65-63 46 48 36
Fax +65-63 46 48 37
awang@badgermeter.com

For Slovakia

Badger Meter Slovakia s. r. o.
Racianska 109 / B
83102 Bratislava
Slovakia
Tel. +421-2-44 63 83 01
Fax +421-2-44 63 83 03
badgermeter@badgermeter.sk
www.badgermeter.sk

For the United Arab Emirates

Badger Meter Europe
Middle East Branch Office
Dubai Silicon Oasis
Head Quarter Building
Wing C, Office #C209
Dubai / UAE
Tel. +971-4-371 2503
Fax +971-4-371 2504
gramaswamy@badgermeter.com

For Mexico

Badger Meter de las
Americas S. A. de C. V.
Pedro Luis Ogazon #32
Col. Guadalupe Inn
Mexico, D. F. 01020
Mexico
Tel. +52-55-56 62-08 82
Fax +52-55-56 62-75 81
bmdla@badgermeter.com

For China

Badger Meter, Inc.
Shanghai Representative
Office 7-1202
99 Hangzhong Road
Minhang District
Shanghai 201101
China
Tel. +86-21-57 63-54 12
Fax +86-21-57 63-54 12
rjiang@badgermeter.com

For the Czech Republic

Badger Meter Czech
Republic s. r. o.
Marikova 2082/26
62100 Brno
Czech Republic
Tel. +420-5-41 42 04 11
Fax +420-5-41 22 97 24
obchod@badgermeter.cz
www.badgermeter.cz